



SIMBOLOGIA / SIMBOLOGY pag. 4-5




OPZIONI DI INSTALLAZIONE / INSTALLATION OPTIONS




COLORI DISPONIBILI / AVAILABLE COLOURS

- 1 COLORE STANDARD STANDARD COLOUR
Bianco White


VERSIONI DISPONIBILI / AVAILABLE VERSIONS

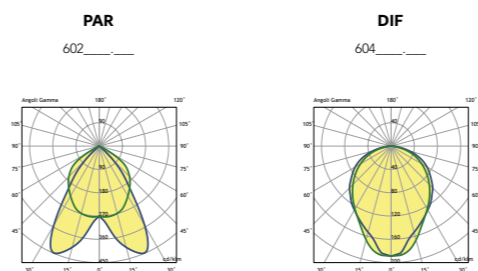

SCHEMA ELETTRICO / WIRING DIAGRAM

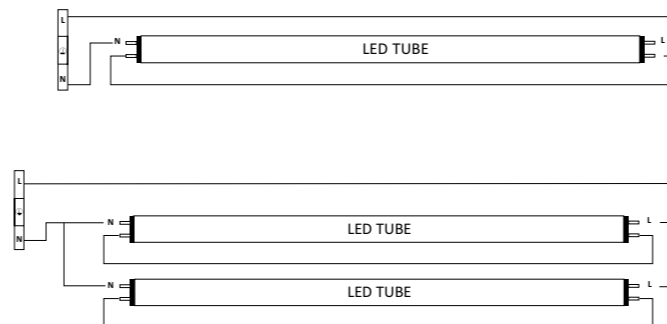

DIMENSIONI / DIMENSIONS

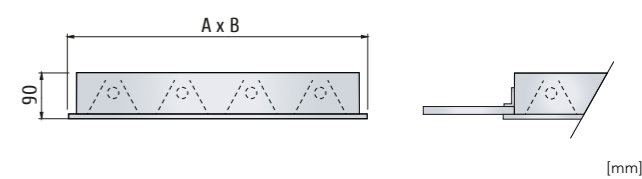

MASTER PAR-DIF



Plafoniera da incasso ad appoggio per pannelli modulari con struttura portante a vista.

Corpo: lamiera di acciaio 6/10, verniciata con polveri poliestere in grado di garantire un'ottima resistenza agli agenti chimici.

Alimentazione: 220/240V 50/60Hz con tensione diretta per tubo LED.

Ottiche disponibili:

PAR: dark/light doppia parabolicità in alluminio pre-anodizzato;

DIF: diffusore in metacrilato prismaticizzato, cornice in lamiera verniciata.

False ceiling recessed fitting for modular panels with visible mounting system.

Housing: 6/10 steel sheet, painted with polyester powders to guarantee an excellent resistance to chemical agents.

Power supply: 220/240V 50/60Hz with direct mains for LED tube wiring.

Available optics:

PAR: dark/light preanodized aluminium double parabolic;

DIF: prismatic methacrylate diffuser, painted metal sheet frame.



	CODICE Code	CABLAGGIO Wiring	POTENZA Power(W)	PORTALAMPADA Lampholder	ESECUZIONE Execution	A (mm)	B (mm)	PESO NETTO Net weight(Kg)
PAR	702611.218	T8 LED TUBE	2x18W	G13	CN	595	295	2,92
	702611.236	T8 LED TUBE	2x36W	G13	CN	1195	295	5,57
	702611.418	T8 LED TUBE	4x18W	G13	CN	595	595	5,45
DIF	704611.218	T8 LED TUBE	2x18W	G13	CN	595	295	2,92
	704611.236	T8 LED TUBE	2x36W	G13	CN	1195	295	5,57
	704611.418	T8 LED TUBE	4x18W	G13	CN	595	595	5,45
	code + 01	Kit emergenza 1h 1h emergency kit ESCLUSA EXCLUDED MASTER LED TUBE						0,39
	code + 03	Kit emergenza 3h 3h emergency kit (solo per just for 2x36W/4x18W) ESCLUSA EXCLUDED MASTER LED TUBE						0,70