

CC COMPACT DIP SWITCH



EASYLINE DIP SWITCH C-R1

187116, 187117, 187119, 187279

Typical Applications

Built-in in compact luminaires for

- Shop lighting
- Office lighting
- Residential lighting
- Downlights



EasyLine DIP switch C-R1

- **SELECTABLE OUTPUT CURRENT VIA DIP SWITCH**
- **VERY LOW RIPPLE CURRENT: < 1%**
- **SELV**
- **LONG SERVICE LIFE: UP TO 100.000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



EasyLine DIP switch C-R1

Product features

- Compact casing shape

Functions

- Selectable current output by dip-switch

Electrical features

- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz
- Push-in terminals:
rigid 0.5–1.5 mm²
strand 0.75–1.5 mm²
- Power factor at full load: > 0.95
- Open circuit voltage (U_{max}): 60 V
- Secondary side switching of LED modules is not allowed.

Safety features

- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Degree of protection: IP20
- Protection class II
- SELV
- SVM: < 0.4
- PstLM: < 1

Packaging units

Ref. No.	Packaging unit		Weight
	Pieces per box	Boxes per pallet	g
187116	40	90	100
187117	40	90	100
187119	40	90	100
187279	40	90	115

Product guarantee

- 5 years
for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com).
We will be happy to send you these conditions upon request.




Dimensions

Ref. No.	Casing	Length mm	Width mm	Height mm
187116	K86	97	43	30
187117, 187119, 187279	K87	97	43	26


Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2/EN 61000-3-3
- EN 62384
- EN 55015
- EN 61000-4-2/EN 61000-4-5

K86



K87



Cord grip for K86



Available for independent operation
Available separately
2 cord grips per LED driver required
Allowed cable jacket diameter:
- Small hole: 3–4 mm
- Big hole: 6–9 mm
Packaging unit: 2 pcs.

Ref. No.: 187203

Cord grip for K87

Available for independent operation
Available separately
2 cord grips per LED driver required
Allowed cable jacket diameter:
- Small hole: 3–4 mm
- Big hole: 6–9 mm
Packaging unit: 2 pcs.

Ref. No.: 187204



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Drivers – EasyLine DIP switch C-R1

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA (\pm 5%)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
21	ECXe 500.479	187116	220–240	152–96	10 / 200	150–500	10–42	< 5	89	< 1
32	ECXe 800.480	187117	220–240	260–198	30 / 200	600–800	28–40	< 6	93	< 1
40	ECXe 800.600	187279	220–240	215–195	16 / 230	500–800	35–50	< 16	89	< 1
42	ECXe 1050.482	187119	220–240	320–240	30 / 200	850–1050	28–40	< 6	90	< 1

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
187116	–20	+45	20	90	–25	+60	20	90	+80	IP20
187117, 187119					–40	+80			+85	
187279					–25	+60			+85	


Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No. 187116			187117, 186119			187279	
All	65 °C*	70 °C	80 °C	65 °C*	75 °C	85 °C	75 °C*	85 °C
hrs.	100,000	88,000	44,000	100,000	60,000	30,000	100,000	50,000

* recommended operation temperature

Product labels

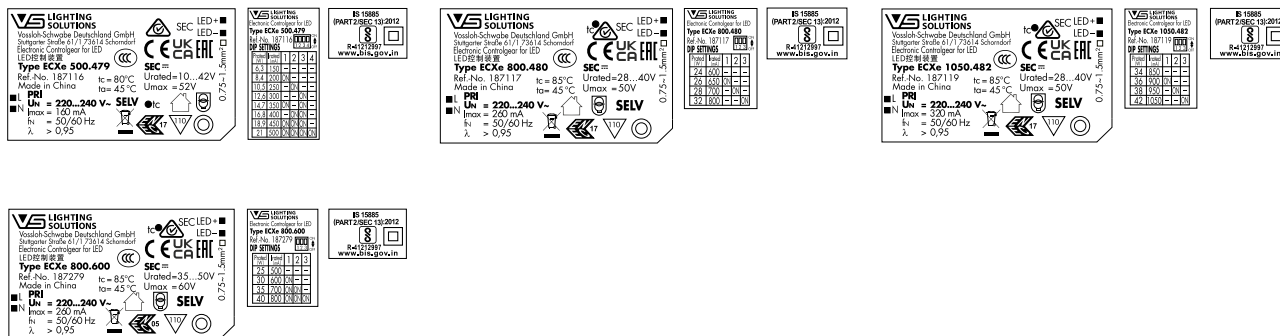

DIP switch settings

187116 / ECXe 500.479						
Pin	2	3	4	Output W	Current mA	Factory settings (mA)
1	OFF	OFF	OFF	6.3	150	500
	ON	OFF	OFF	8.4	200	
	OFF	ON	OFF	10.5	250	
	OFF	OFF	ON	12.6	300	
	ON	OFF	ON	14.7	350	
	OFF	ON	ON	16.8	400	
	ON	ON	OFF	18.9	450	
	ON	ON	ON	21	500	


187117 / ECXe 800.480					
Pin			Output	Current	Factory
1	2	3	W	mA	settings (mA)
OFF	OFF	OFF	24	600	800
ON	OFF	OFF	26	650	
OFF	ON	OFF	28	700	
OFF	OFF	ON	32	800	
187279 / ECXe 800.600					
Pin			Leistung	Strom	Werksein-
1	2	3	W	mA	stellung (mA)
OFF	OFF	OFF	25	500	800
ON	OFF	OFF	30	600	
ON	ON	OFF	35	700	
ON	ON	ON	40	800	

187119 / ECXe 1050.482						
Pin	2	3	W	Current mA	Factory settings (mA)	
1	OFF	OFF	34	850	1050	
	ON	OFF	36	900		
	OFF	ON	38	950		
	OFF	OFF	42	1050		


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 1871 16 / Type ECXe 500.479


Working area

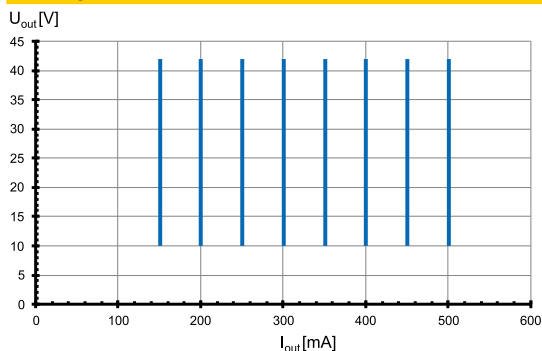


Efficiency

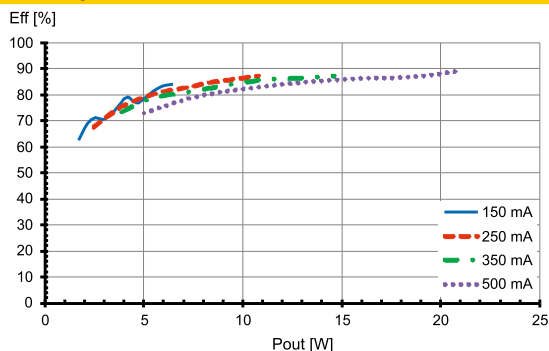

Power factor

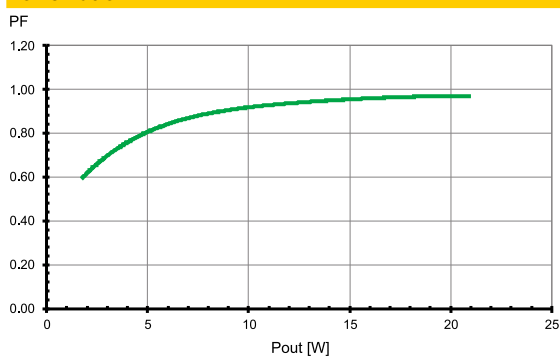


Total harmonic factor (THD)

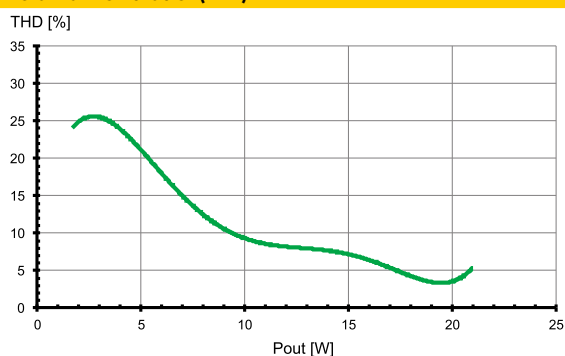


Typ. performance graphs for 1871 17 / Type ECXe 800.480


Working area

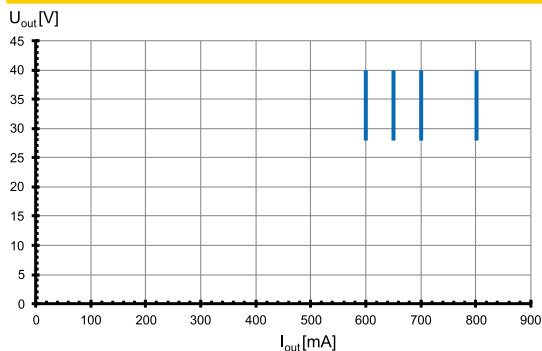


Efficiency

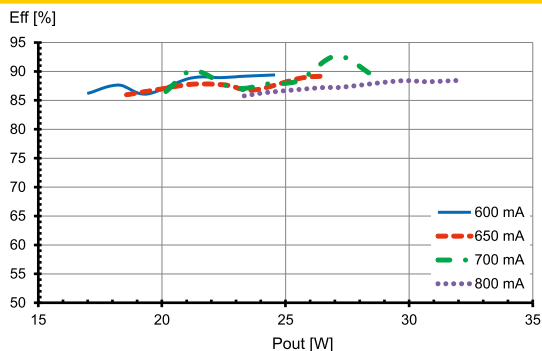

Power factor

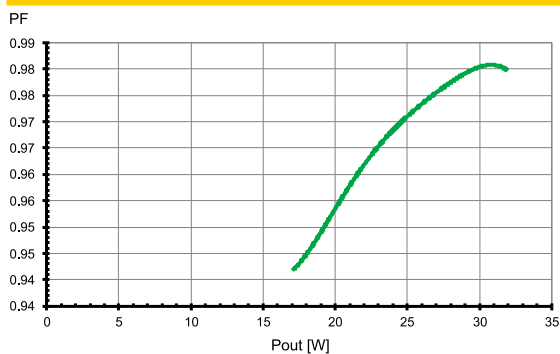


Total harmonic factor (THD)

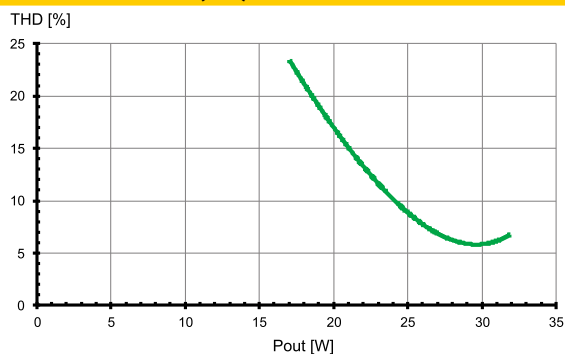


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Typ. performance graphs for 187119 / Type ECXe 1050.482


Working area

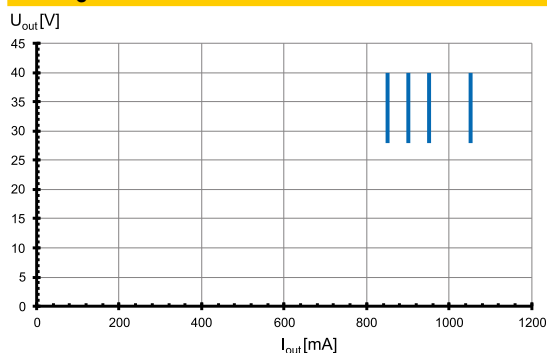


Efficiency

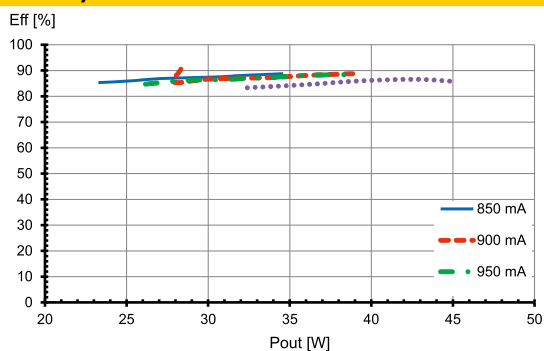

Power factor

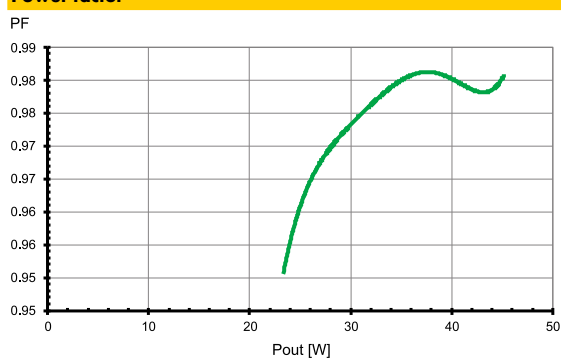


Total harmonic factor (THD)

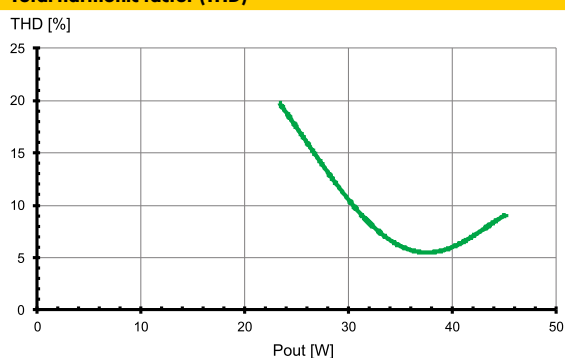


Typ. performance graphs for 187279 / Type ECXe 800.600


Working area

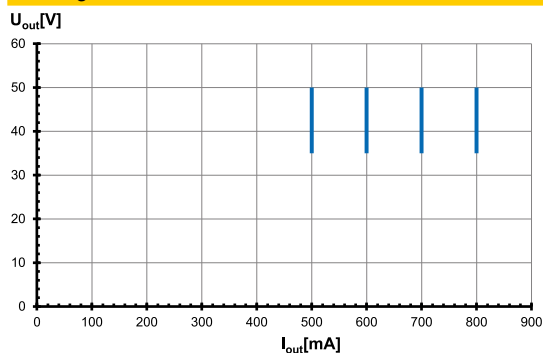


Efficiency

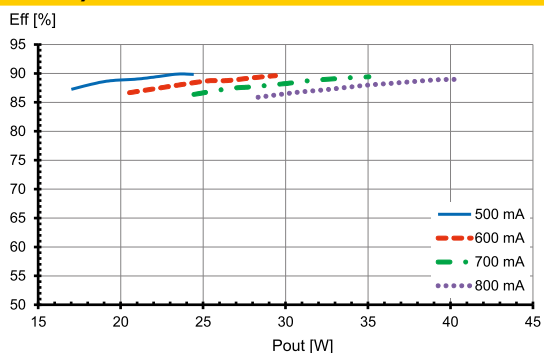

Power factor

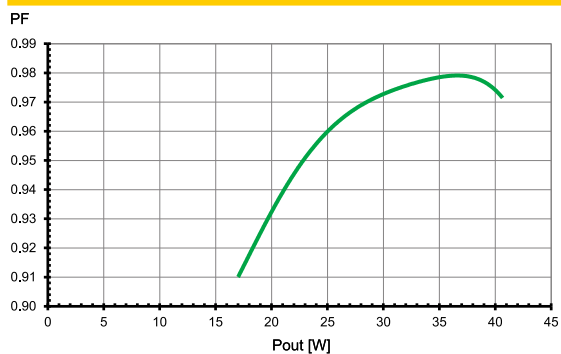

Total harmonic factor (THD)

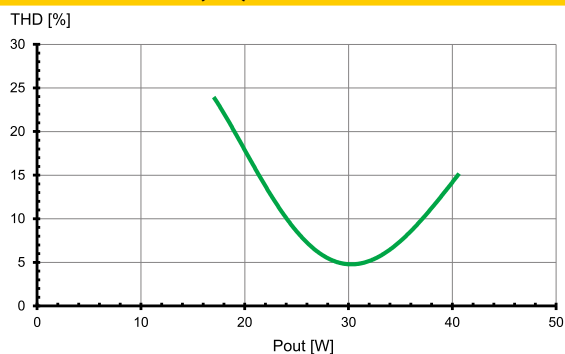

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Safety functions

- Transient mains peaks protection:
Values are in compliance with EN 61547
(interference immunity).
Surges between L–N: up to 1 kV
- Short-circuit protection: The control gear is protected against
permanent short-circuit with automatic restart
function.
- Overload protection: The control gear only works in range of rated
output power and voltage problemfree
($< 60\text{ V DC}$).
Please check before switch-on mains power
supply that the selected LED load is suitable
(see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection.
In case of overheating the output current of the
control gear will be reduced. After the tempe-
rature will drop below the critical temperature
value, the output current rises again to the
previously set value.
- No load operation: The control gear is protected against no load
operation (open load).
- If any of the above mentioned safety functions will be triggered,
disconnect the control gear from the power supply then find and
eliminate the cause of the problem.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1

Mechanical mounting


- Mounting position: Built-in: Any position inside a luminaire is allowed
Independent application: Drivers are allowed to use for independent applications with separate cord grip (Ref. No.: 187203 for K86 or 187204 for K87).
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices.
Independent LED drivers do not need to be integrated into a casing.
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.
LED drivers should be mounted with the greatest possible clearance to heat sources.
During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of rigid 0.5–1.5 mm² strand 0.75–1.5 mm²
- Stripped length: 7–8 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
Max. secondary side lead length: 2 m

- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.
- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- Parallel wiring: Parallel connection of LED loads is not allowed.

- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641 part 11 for B characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m Ω (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
ECXe 500.479	187116	30	38	45	38	47	57
ECXe 800.480	187117	22	27	32	27	34	41
ECXe 800.600	187279	23	30	36	38	50	61
ECXe 1050.482	187119	16	20	24	20	25	30

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.