

High Voltage LED Series
Chip on Board

COB D-Gen.3



High efficacy COB LED package
well-suited for use in spotlight applications

Features & Benefits

- Chip on Board (COB) solution makes it easy to design in
- Simple assembly reduces manufacturing cost
- Low thermal resistance
- InGaN/GaN MQW LED with long time reliability



Applications

- Spotlight / Downlight
- LED Retrofit Bulbs
- Outdoor Illumination

Table of Contents

1.	Characteristics	-----	3
2.	Product Code Information	-----	11
3.	Typical Characteristics Graphs	-----	24
4.	Outline Drawing & Dimension	-----	32
5.	Reliability Test Items & Conditions	-----	35
6.	Label Structure	-----	36
7.	Packing structure	-----	37
8.	Precautions in Handling & Use	-----	40

1. Characteristics

a) Absolute Maximum Rating

Item	Symbol	Model	Rating	Unit	Condition
Ambient / Operating Temperature	T_a	-	-40 ~ +105	°C	-
Storage Temperature	T_{stg}	-	-40 ~ +120	°C	-
LED Junction Temperature	T_J	-	150	°C	-
Case Temperature	T_c	-	115	°C	-
Forward Current / Power Dissipation	I_F / P_D	LC003D	230 / 8.8	mA / W	-
		LC006D	460 / 17.5		-
		LC009D	690 / 26.3		-
		LC013D	920 / 35.0		-
		LC016D	1150 / 43.8		-
		LC019D	1380 / 52.6		-
		LC026D	1840 / 70.1		-
		LC033D	2300 / 87.6		-
		LC040D	2760 / 105.1		-
		LC060D	2760 / 157.7		-
		LC080D	4140 / 236.5		-
ESD (HBM)	-	-	±2	kV	-
ESD (MM)	-	-	±0.5	kV	-

b) Electro-optical Characteristics (I_F = Sorting Current, T_J = 85 °C)

Item	Unit	Model	Rank	Min.	Typ.	Max.
Forward Voltage (V _F)	V	All model	YZ	31.0	34.0	37.0
			1Z	46.8	51.0	55.2
Color Rendering Index (R _a)	-	All model	3	70	-	-
			5	80	-	-
			7	90	-	-
Beam Angle	°	-	-	-	115	-
Nominal Power / Sorting Current	W / mA	LC003D	-	-	3.1 / 90	-
		LC006D	-	-	6.1 / 180	-
		LC009D	-	-	9.2 / 270	-
		LC013D	-	-	12.2 / 360	-
		LC016D	-	-	15.3 / 450	-
		LC019D	-	-	18.4 / 540	-
		LC026D	-	-	24.5 / 720	-
		LC033D	-	-	30.6 / 900	-
		LC040D	-	-	36.7 / 1080	-
		LC060D	-	-	55.1 / 1080	-
		LC080D	-	-	82.6 / 1620	-
		LC003D	-	-	2.43	-
		LC006D	-	-	1.41	-
Thermal Resistance (Junction to chip case)	°C/W	LC009D	-	-	0.94	-
		LC013D	-	-	0.81	-
		LC016D	-	-	0.64	-
		LC019D	-	-	0.57	-
		LC026D	-	-	0.45	-
		LC033D	-	-	0.38	-
		LC040D	-	-	0.30	-
		LC060D	-	-	0.23	-
		LC080D	-	-	0.15	-

Notes:

- 1) The COB is tested in pulsed condition at rated test current (10 ms pulse width) and rated temperature (T_J = T_C = T_a = 85 °C)
- 2) Samsung maintains measurement tolerance of: forward voltage = ±5 %, CRI = ±1
- 3) Refer to the derating curve, '3. Typical Characteristics Graph' designed within the range.

c) Luminous Flux Characteristics (I_F = Sorting Current)

Model	CRI (R _a) Min.	Nominal CCT (K)	Flux Rank	Flux@ T _J = 85 °C (lm)		
				Min.	Typ.	Max.
LC003D	80	2700	D3	451	475	-
		3000	D3	474	499	-
		3500	D3	488	514	-
		4000	D3	498	524	-
		5000	D3	502	529	-
		5700	D3	502	529	-
	90	6500	D3	498	524	-
		2700	D3	386	407	-
		3000	D3	406	428	-
		3500	D3	419	441	-
		4000	D3	427	450	-
LC006D	80	5000	D3	431	453	-
		2700	D3	898	946	-
		3000	D3	944	994	-
		3500	D3	972	1023	-
		4000	D3	991	1043	-
		5000	D3	1000	1052	-
	90	5700	D3	1000	1052	-
		6500	D3	991	1043	-
		2700	D3	769	809	-
		3000	D3	809	851	-
		3500	D3	833	877	-
		4000	D3	850	895	-
		5000	D3	857	902	-

Notes:

- 1) The COB is tested in pulsed operating condition at rated test current (10 ms pulse width) and rated temperature (T_J = T_C = 85 °C).
- 2) Samsung maintains measurement tolerance of: Luminous flux = ±7 %, CRI = ±1

Model	CRI (R _a) Min.	Nominal CCT (K)	Flux Rank	Flux@ T _J = 85 °C (lm)		
				Min.	Typ.	Max.
LC009D	70	3000	D3	1515	1594	-
		4000	D3	1543	1624	-
		5000	D3	1571	1653	-
	80	2700	D3	1334	1405	-
		3000	D3	1402	1476	-
		3500	D3	1443	1519	-
		4000	D3	1472	1550	-
		5000	D3	1485	1563	-
		5700	D3	1485	1563	-
		6500	D3	1472	1550	-
	90	2700	D3	1142	1202	-
		3000	D3	1201	1264	-
		3500	D3	1237	1302	-
		4000	D3	1263	1329	-
		5000	D3	1273	1340	-
LC013D	70	3000	D3	1989	2094	-
		4000	D3	2026	2133	-
		5000	D3	2063	2171	-
	80	2700	D3	1753	1845	-
		3000	D3	1842	1939	-
		3500	D3	1896	1996	-
		4000	D3	1934	2036	-
		5000	D3	1950	2053	-
		5700	D3	1950	2053	-
		6500	D3	1934	2036	-
	90	2700	D3	1500	1579	-
		3000	D3	1578	1661	-
		3500	D3	1625	1710	-
		4000	D3	1658	1745	-
		5000	D3	1672	1760	-

Notes:

- 2) The COB is tested in pulsed operating condition at rated test current (10 ms pulse width) and rated temperature (T_J = T_C = 85 °C).
- 2) Samsung maintains measurement tolerance of: Luminous flux = ±7 %, CRI = ±1

Model	CRI (R _a) Min.	Nominal CCT (K)	Flux Rank	Flux@ T _J = 85 °C (lm)		
				Min.	Typ.	Max.
LC016D	70	3000	D3	2562	2697	-
		4000	D3	2609	2747	-
		5000	D3	2657	2797	-
	80	2700	D3	2257	2376	-
		3000	D3	2372	2497	-
		3500	D3	2442	2570	-
		4000	D3	2490	2622	-
		5000	D3	2511	2644	-
		5700	D3	2511	2644	-
		6500	D3	2490	2622	-
	90	2700	D3	1932	2033	-
		3000	D3	2032	2139	-
		3500	D3	2093	2203	-
		4000	D3	2136	2248	-
		5000	D3	2154	2267	-
LC019D	70	3000	D3	3059	3220	-
		4000	D3	3116	3280	-
		5000	D3	3172	3339	-
	80	2700	D3	2695	2837	-
		3000	D3	2833	2982	-
		3500	D3	2916	3069	-
		4000	D3	2974	3130	-
		5000	D3	2999	3157	-
		5700	D3	2999	3157	-
		6500	D3	2974	3130	-
	90	2700	D3	2307	2428	-
		3000	D3	2426	2554	-
		3500	D3	2499	2630	-
		4000	D3	2550	2684	-
		5000	D3	2572	2707	-

Notes:

- 3) The COB is tested in pulsed operating condition at rated test current (10 ms pulse width) and rated temperature (T_J = T_C = 85 °C).
- 2) Samsung maintains measurement tolerance of: Luminous flux = ±7 %, CRI = ±1

Model	CRI (R _a) Min.	Nominal CCT (K)	Flux Rank	Flux@ T _J = 85 °C (lm)		
				Min.	Typ.	Max.
LC026D	70	3000	D3	4019	4230	-
		4000	D3	4093	4308	-
		5000	D3	4167	4387	-
	80	2700	D3	3541	3727	-
		3000	D3	3721	3917	-
		3500	D3	3830	4032	-
		4000	D3	3907	4112	-
		5000	D3	3939	4147	-
		5700	D3	3939	4147	-
		6500	D3	3907	4112	-
	90	2700	D3	3030	3190	-
		3000	D3	3187	3355	-
		3500	D3	3282	3455	-
		4000	D3	3350	3526	-
		5000	D3	3379	3556	-
LC033D	70	3000	D3	4973	5235	-
		4000	D3	5065	5332	-
		5000	D3	5157	5429	-
	80	2700	D3	4382	4612	-
		3000	D3	4605	4847	-
		3500	D3	4740	4989	-
		4000	D3	4834	5089	-
		5000	D3	4875	5132	-
		5700	D3	4875	5132	-
		6500	D3	4834	5089	-
	90	2700	D3	3750	3947	-
		3000	D3	3944	4152	-
		3500	D3	4062	4276	-
		4000	D3	4146	4364	-
		5000	D3	4181	4401	-

Notes:

- 4) The COB is tested in pulsed operating condition at rated test current (10 ms pulse width) and rated temperature (T_J = T_C = 85 °C).
- 2) Samsung maintains measurement tolerance of: Luminous flux = ±7 %, CRI = ±1

Model	CRI (R _a) Min.	Nominal CCT (K)	Flux Rank	Flux@ T _J = 85 °C (lm)		
				Min.	Typ.	Max.
LC040D	70	3000	D3	6118	6440	-
		4000	D3	6232	6560	-
		5000	D3	6345	6679	-
	80	2700	D3	5391	5675	-
		3000	D3	5665	5963	-
		3500	D3	5831	6138	-
		4000	D3	5948	6261	-
		5000	D3	5998	6313	-
		5700	D3	5998	6313	-
		6500	D3	5948	6261	-
	90	2700	D3	4614	4856	-
		3000	D3	4853	5108	-
		3500	D3	4997	5260	-
		4000	D3	5100	5369	-
		5000	D3	5144	5415	-
LC060D	70	3000	D3	9042	9518	-
		4000	D3	9209	9694	-
		5000	D3	9377	9870	-
	80	2700	D3	7967	8386	-
		3000	D3	8372	8813	-
		3500	D3	8617	9071	-
		4000	D3	8790	9253	-
		5000	D3	8864	9330	-
		5700	D3	8864	9330	-
		6500	D3	8790	9253	-
	90	2700	D3	6818	7177	-
		3000	D3	7172	7549	-
		3500	D3	7385	7774	-
		4000	D3	7537	7934	-
		5000	D3	7602	8002	-

Notes:

- 5) The COB is tested in pulsed operating condition at rated test current (10 ms pulse width) and rated temperature (T_J = T_C = 85 °C).
- 2) Samsung maintains measurement tolerance of: Luminous flux = ±7 %, CRI = ±1

Model	CRI (R _a) Min.	Nominal CCT (K)	Flux Rank	Flux@ T _J = 85 °C (lm)		
				Min.	Typ.	Max.
LC080D	70	3000	D3	13409	14115	-
		4000	D3	13657	14376	-
		5000	D3	13906	14637	-
	80	2700	D3	11815	12437	-
		3000	D3	12416	13069	-
		3500	D3	12779	13452	-
		4000	D3	13035	13721	-
		5000	D3	13144	13836	-
		5700	D3	13144	13836	-
		6500	D3	13035	13721	-
	90	2700	D3	10111	10643	-
		3000	D3	10635	11195	-
		3500	D3	10952	11529	-
		4000	D3	11178	11766	-
		5000	D3	11273	11867	-

Notes:

- 6) The COB is tested in pulsed operating condition at rated test current (10 ms pulse width) and rated temperature (T_J = T_C = 85 °C).
- 2) Samsung maintains measurement tolerance of: Luminous flux = ±7 %, CRI = ±1

2. Product Code Information

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
S	P	H	W	H	A	H	D	N	G	2	5	Y	Z	W	3	D	3

Digit	PKG Information	Code	Specification
1 2 3	Samsung Package High Power	SPH	
4 5	Color	WH	White
6	Product Version	A	
7 8	Form Factor	HD	COB
9	Lens Type	N	No lens
10	Wattage or Model	A LC003D B LC006D C LC009D D LC013D E LC016D F LC019D G LC026D H LC033D K LC040D L LC060D M LC080D	
11	Internal Code	2	
12	CRI & Sorting Temperature	3 Min. 70 (85°C) 5 Min. 80 (85°C) 7 Min. 90 (85°C)	
13 14	Forward Voltage (V)	YZ 31.0~37.0 1Z 46.8~55.2	
15	CCT (K)	W 2700K V 3000K U 3500K T 4000K R 5000K Q 5700K P 6500K	
16	MacAdam Step	2 MacAdam 2-step 3 MacAdam 3-step	
17 18	Luminous Flux (Lm)	D3	COB D-series Gen.3 level

a) Binning Structure

※ LCo₃D(I_F = 90 mA, T_J = 85 °C)

CRI(R _s) Min.	Nominal CCT(K)	Product Code	V _F Rank	Color Rank	Flux Rank	Flux Range (Φ _v , lm)
80	2700	SPHWAHDNA25YZW2D3	YZ	W2	D3	451 ~
		SPHWAHDNA25YZW3D3		W3		
	3000	SPHWAHDNA25YZV2D3	YZ	V2	D3	474 ~
		SPHWAHDNA25YZV3D3		V3		
	3500	SPHWAHDNA25YZU2D3	YZ	U2	D3	488 ~
		SPHWAHDNA25YZU3D3		U3		
	4000	SPHWAHDNA25YZT2D3	YZ	T2	D3	498 ~
		SPHWAHDNA25YZT3D3		T3		
	5000	SPHWAHDNA25YZR3D3	YZ	R3	D3	502 ~
	5700	SPHWAHDNA25YZQ3D3	YZ	Q3	D3	502 ~
	6500	SPHWAHDNA25YZP3D3	YZ	P3	D3	498 ~
90	2700	SPHWAHDNA27YZW2D3	YZ	W2	D3	386 ~
		SPHWAHDNA27YZW3D3		W3		
	3000	SPHWAHDNA27YZV2D3	YZ	V2	D3	406 ~
		SPHWAHDNA27YZV3D3		V3		
	3500	SPHWAHDNA27YZU2D3	YZ	U2	D3	419 ~
		SPHWAHDNA27YZU3D3		U3		
	4000	SPHWAHDNA27YZT2D3	YZ	T2	D3	427 ~
		SPHWAHDNA27YZT3D3		T3		
	5000	SPHWAHDNA27YZR3D3	YZ	R3	D3	431 ~

※ LCoo6D(I_F = 180 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Color Rank	Flux Rank	Flux Range (Φ _v , lm)
80	2700	SPHWAHDNB25YZW2D3	YZ	W2	D3	898 ~
		SPHWAHDNB25YZW3D3		W3		
	3000	SPHWAHDNB25YZV2D3	YZ	V2	D3	944 ~
		SPHWAHDNB25YZV3D3		V3		
	3500	SPHWAHDNB25YZU2D3	YZ	U2	D3	972 ~
		SPHWAHDNB25YZU3D3		U3		
	4000	SPHWAHDNB25YZT2D3	YZ	T2	D3	991 ~
		SPHWAHDNB25YZT3D3		T3		
	5000	SPHWAHDNB25YZR3D3	YZ	R2	D3	1000 ~
	5700	SPHWAHDNB25YZQ3D3	YZ	Q2	D3	1000 ~
	6500	SPHWAHDNB25YZP3D3	YZ	P2	D3	991 ~
90	2700	SPHWAHDNB27YZW2D3	YZ	W2	D3	769 ~
		SPHWAHDNB27YZW3D3		W3		
	3000	SPHWAHDNB27YZV2D3	YZ	V2	D3	809 ~
		SPHWAHDNB27YZV3D3		V3		
	3500	SPHWAHDNB27YZU2D3	YZ	U2	D3	833 ~
		SPHWAHDNB27YZU3D3		U3		
	4000	SPHWAHDNB27YZT2D3	YZ	T2	D3	850 ~
		SPHWAHDNB27YZT3D3		T3		
	5000	SPHWAHDNB27YZR3D3	YZ	R3	D3	857 ~

※ LCoogD(I_F = 270 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Color Rank	Flux Rank	Flux Range (Φ _v , lm)
70	3000	SPHWWAHDNC23YZV3D3	YZ	V3	D3	1515 ~
	4000	SPHWWAHDNC23YZT3D3	YZ	T3	D3	1543 ~
	5000	SPHWWAHDNC23YZR3D3	YZ	R3	D3	1571 ~
80	2700	SPHWWAHDNC25YZW2D3	YZ	W2	D3	1334 ~
		SPHWWAHDNC25YZW3D3		W3		
	3000	SPHWWAHDNC25YZV2D3	YZ	V2	D3	1402 ~
		SPHWWAHDNC25YZV3D3		V3		
	3500	SPHWWAHDNC25YZU2D3	YZ	U2	D3	1443 ~
		SPHWWAHDNC25YZU3D3		U3		
	4000	SPHWWAHDNC25YZT2D3	YZ	T2	D3	1472 ~
		SPHWWAHDNC25YZT3D3		T3		
	5000	SPHWWAHDNC25YZR3D3	YZ	R3	D3	1485 ~
	5700	SPHWWAHDNC25YZQ3D3	YZ	Q3	D3	1485 ~
	6500	SPHWWAHDNC25YZP3D3	YZ	P3	D3	1472 ~
90	2700	SPHWWAHDNC27YZW2D3	YZ	W2	D3	1142 ~
		SPHWWAHDNC27YZW3D3		W3		
	3000	SPHWWAHDNC27YZV2D3	YZ	V2	D3	1201 ~
		SPHWWAHDNC27YZV3D3		V3		
	3500	SPHWWAHDNC27YZU2D3	YZ	U2	D3	1237 ~
		SPHWWAHDNC27YZU3D3		U3		
	4000	SPHWWAHDNC27YZT2D3	YZ	T2	D3	1263 ~
		SPHWWAHDNC27YZT3D3		T3		
	5000	SPHWWAHDNC27YZR3D3	YZ	R3	D3	1273 ~

※ LCo13D(I_F = 360 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Color Rank	Flux Rank	Flux Range (Φ _v , lm)
70	3000	SPHWWAHDND23YZV3D3	YZ	V3	D3	1989 ~
	4000	SPHWWAHDND23YZT3D3	YZ	T3	D3	2026 ~
	5000	SPHWWAHDND23YZR3D3	YZ	R3	D3	2063 ~
80	2700	SPHWWAHDND25YZW2D3	YZ	W2	D3	1753 ~
		SPHWWAHDND25YZW3D3		W3		
	3000	SPHWWAHDND25YZV2D3	YZ	V2	D3	1842 ~
		SPHWWAHDND25YZV3D3		V3		
	3500	SPHWWAHDND25YZU2D3	YZ	U2	D3	1896 ~
		SPHWWAHDND25YZU3D3		U3		
	4000	SPHWWAHDND25YZT2D3	YZ	T2	D3	1934 ~
		SPHWWAHDND25YZT3D3		T3		
	5000	SPHWWAHDND25YZR3D3	YZ	R3	D3	1950 ~
	5700	SPHWWAHDND25YZQ3D3	YZ	Q3	D3	1950 ~
	6500	SPHWWAHDND25YZP3D3	YZ	P3	D3	1934 ~
90	2700	SPHWWAHDND27YZW2D3	YZ	W2	D3	1500 ~
		SPHWWAHDND27YZW3D3		W3		
	3000	SPHWWAHDND27YZV2D3	YZ	V2	D3	1578 ~
		SPHWWAHDND27YZV3D3		V3		
	3500	SPHWWAHDND27YZU2D3	YZ	U2	D3	1625 ~
		SPHWWAHDND27YZU3D3		U3		
	4000	SPHWWAHDND27YZT2D3	YZ	T2	D3	1658 ~
		SPHWWAHDND27YZT3D3		T3		
	5000	SPHWWAHDND27YZR3D3	YZ	R3	D3	1672 ~

※ LCo16D($I_F = 450 \text{ mA}$, $T_J = 85 \text{ }^\circ\text{C}$)

CRI(R_a) Min.	Nominal CCT(K)	Product Code	V_F Rank	Color Rank	Flux Rank	Flux Range (Φ_v , lm)
70	3000	SPHWWAHDNE23YZV3D3	YZ	V3	D3	2562 ~
	4000	SPHWWAHDNE23YZT3D3	YZ	T3	D3	2609 ~
	5000	SPHWWAHDNE23YZR3D3	YZ	R3	D3	2657 ~
80	2700	SPHWWAHDNE25YZW2D3	YZ	W2	D3	2257 ~
		SPHWWAHDNE25YZW3D3		W3		
	3000	SPHWWAHDNE25YZV2D3	YZ	V2	D3	2372 ~
		SPHWWAHDNE25YZV3D3		V3		
	3500	SPHWWAHDNE25YZU2D3	YZ	U2	D3	2442 ~
		SPHWWAHDNE25YZU3D3		U3		
	4000	SPHWWAHDNE25YZT2D3	YZ	T2	D3	2490 ~
		SPHWWAHDNE25YZT3D3		T3		
	5000	SPHWWAHDNE25YZR3D3	YZ	R3	D3	2511 ~
	5700	SPHWWAHDNE25YZQ3D3	YZ	Q3	D3	2511 ~
	6500	SPHWWAHDNE25YZP3D3	YZ	P3	D3	2490 ~
90	2700	SPHWWAHDNE27YZW2D3	YZ	W2	D3	1932 ~
		SPHWWAHDNE27YZW3D3		W3		
	3000	SPHWWAHDNE27YZV2D3	YZ	V2	D3	2032 ~
		SPHWWAHDNE27YZV3D3		V3		
	3500	SPHWWAHDNE27YZU2D3	YZ	U2	D3	2093 ~
		SPHWWAHDNE27YZU3D3		U3		
	4000	SPHWWAHDNE27YZT2D3	YZ	T2	D3	2136 ~
		SPHWWAHDNE27YZT3D3		T3		
	5000	SPHWWAHDNE27YZR3D3	YZ	R3	D3	2154 ~

※ LCo19D(I_F = 540 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Color Rank	Flux Rank	Flux Range (Φ _v , lm)
70	3000	SPHWWAHDNF23YZV3D3	YZ	V3	D3	3059 ~
	4000	SPHWWAHDNF23YZT3D3	YZ	T3	D3	3116 ~
	5000	SPHWWAHDNF23YZR3D3	YZ	R3	D3	3172 ~
80	2700	SPHWWAHDNF25YZW2D3	YZ	W2	D3	2695 ~
		SPHWWAHDNF25YZW3D3		W3		
	3000	SPHWWAHDNF25YZV2D3	YZ	V2	D3	2833 ~
		SPHWWAHDNF25YZV3D3		V3		
	3500	SPHWWAHDNF25YZU2D3	YZ	U2	D3	2916 ~
		SPHWWAHDNF25YZU3D3		U3		
	4000	SPHWWAHDNF25YZT2D3	YZ	T2	D3	2974 ~
		SPHWWAHDNF25YZT3D3		T3		
	5000	SPHWWAHDNF25YZR3D3	YZ	R3	D3	2999 ~
	5700	SPHWWAHDNF25YZQ3D3	YZ	Q3	D3	2999 ~
	6500	SPHWWAHDNF25YZP3D3	YZ	P3	D3	2974 ~
90	2700	SPHWWAHDNF27YZW2D3	YZ	W2	D3	2307 ~
		SPHWWAHDNF27YZW3D3		W3		
	3000	SPHWWAHDNF27YZV2D3	YZ	V2	D3	2426 ~
		SPHWWAHDNF27YZV3D3		V3		
	3500	SPHWWAHDNF27YZU2D3	YZ	U2	D3	2499 ~
		SPHWWAHDNF27YZU3D3		U3		
	4000	SPHWWAHDNF27YZT2D3	YZ	T2	D3	2550 ~
		SPHWWAHDNF27YZT3D3		T3		
	5000	SPHWWAHDNF27YZR3D3	YZ	R3	D3	2572 ~

※ LCo26D(I_F = 720 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Color Rank	Flux Rank	Flux Range (Φ _v , lm)
70	3000	SPHWWAHDNG23YZV3D3	YZ	V3	D3	4019 ~
	4000	SPHWWAHDNG23YZT3D3	YZ	T3	D3	4093 ~
	5000	SPHWWAHDNG23YZR3D3	YZ	R3	D3	4167 ~
80	2700	SPHWWAHDNG25YZW2D3	YZ	W2	D3	3541 ~
		SPHWWAHDNG25YZW3D3		W3		
	3000	SPHWWAHDNG25YZV2D3	YZ	V2	D3	3721 ~
		SPHWWAHDNG25YZV3D3		V3		
	3500	SPHWWAHDNG25YZU2D3	YZ	U2	D3	3830 ~
		SPHWWAHDNG25YZU3D3		U3		
	4000	SPHWWAHDNG25YZT2D3	YZ	T2	D3	3907 ~
		SPHWWAHDNG25YZT3D3		T3		
	5000	SPHWWAHDNG25YZR3D3	YZ	R3	D3	3939 ~
	5700	SPHWWAHDNG25YZQ3D3	YZ	Q3	D3	3939 ~
	6500	SPHWWAHDNG25YZP3D3	YZ	P3	D3	3907 ~
90	2700	SPHWWAHDNG27YZW2D3	YZ	W2	D3	3030 ~
		SPHWWAHDNG27YZW3D3		W3		
	3000	SPHWWAHDNG27YZV2D3	YZ	V2	D3	3187 ~
		SPHWWAHDNG27YZV3D3		V3		
	3500	SPHWWAHDNG27YZU2D3	YZ	U2	D3	3282 ~
		SPHWWAHDNG27YZU3D3		U3		
	4000	SPHWWAHDNG27YZT2D3	YZ	T2	D3	3350 ~
		SPHWWAHDNG27YZT3D3		T3		
	5000	SPHWWAHDNG27YZR3D3	YZ	R3	D3	3379 ~

※ LCo₃D(I_F = 900 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Color Rank	Flux Rank	Flux Range (Φ _v , lm)
70	3000	SPHWAHDNH23YZV3D3	YZ	V3	D3	4973 ~
	4000	SPHWAHDNH23YZT3D3	YZ	T3	D3	5065 ~
	5000	SPHWAHDNH23YZR3D3	YZ	R3	D3	5157 ~
80	2700	SPHWAHDNH25YZW2D3	YZ	W2	D3	4382 ~
		SPHWAHDNH25YZW3D3		W3		
	3000	SPHWAHDNH25YZV2D3	YZ	V2	D3	4605 ~
		SPHWAHDNH25YZV3D3		V3		
	3500	SPHWAHDNH25YZU2D3	YZ	U2	D3	4740 ~
		SPHWAHDNH25YZU3D3		U3		
	4000	SPHWAHDNH25YZT2D3	YZ	T2	D3	4834 ~
		SPHWAHDNH25YZT3D3		T3		
	5000	SPHWAHDNH25YZR3D3	YZ	R3	D3	4875 ~
	5700	SPHWAHDNH25YZQ3D3	YZ	Q3	D3	4875 ~
	6500	SPHWAHDNH25YZP3D3	YZ	P3	D3	4834 ~
90	2700	SPHWAHDNH27YZW2D3	YZ	W2	D3	3750 ~
		SPHWAHDNH27YZW3D3		W3		
	3000	SPHWAHDNH27YZV2D3	YZ	V2	D3	3944 ~
		SPHWAHDNH27YZV3D3		V3		
	3500	SPHWAHDNH27YZU2D3	YZ	U2	D3	4062 ~
		SPHWAHDNH27YZU3D3		U3		
	4000	SPHWAHDNH27YZT2D3	YZ	T2	D3	4146 ~
		SPHWAHDNH27YZT3D3		T3		
	5000	SPHWAHDNH27YZR3D3	YZ	R3	D3	4181 ~

※ LCo4oD(I_F = 1080 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Color Rank	Flux Rank	Flux Range (Φ _v , lm)
70	3000	SPHWAHDNK23YZV3D3	YZ	V3	D3	6118 ~
	4000	SPHWAHDNK23YZT3D3	YZ	T3	D3	6232 ~
	5000	SPHWAHDNK23YZR3D3	YZ	R3	D3	6345 ~
80	2700	SPHWAHDNK25YZW2D3	YZ	W2	D3	5391 ~
		SPHWAHDNK25YZW3D3		W3		
	3000	SPHWAHDNK25YZV2D3	YZ	V2	D3	5665 ~
		SPHWAHDNK25YZV3D3		V3		
	3500	SPHWAHDNK25YZU2D3	YZ	U2	D3	5831 ~
		SPHWAHDNK25YZU3D3		U3		
	4000	SPHWAHDNK25YZT2D3	YZ	T2	D3	5948 ~
		SPHWAHDNK25YZT3D3		T3		
	5000	SPHWAHDNK25YZR3D3	YZ	R3	D3	5998 ~
	5700	SPHWAHDNK25YZQ3D3	YZ	Q3	D3	5998 ~
	6500	SPHWAHDNK25YZP3D3	YZ	P3	D3	5948 ~
90	2700	SPHWAHDNK27YZW2D3	YZ	W2	D3	4614 ~
		SPHWAHDNK27YZW3D3		W3		
	3000	SPHWAHDNK27YZV2D3	YZ	V2	D3	4853 ~
		SPHWAHDNK27YZV3D3		V3		
	3500	SPHWAHDNK27YZU2D3	YZ	U2	D3	4997 ~
		SPHWAHDNK27YZU3D3		U3		
	4000	SPHWAHDNK27YZT2D3	YZ	T2	D3	5100 ~
		SPHWAHDNK27YZT3D3		T3		
	5000	SPHWAHDNK27YZR3D3	YZ	R3	D3	5144 ~



※ LCo6oD(I_F = 1080 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Chrom. Bin	Flux Rank	Flux Range (Φ _v , lm)
70	3000	SPHWWAHDNL231ZV3D3	1Z	V3	D3	9042 ~
	4000	SPHWWAHDNL231ZT3D3	1Z	T3	D3	9209 ~
	5000	SPHWWAHDNL231ZR3D3	1Z	R3	D3	9377 ~
80	2700	SPHWWAHDNL251ZW2D3	1Z	W2	D3	7967 ~
		SPHWWAHDNL251ZW3D3		W3		
	3000	SPHWWAHDNL251ZV2D3	1Z	V2	D3	8372 ~
		SPHWWAHDNL251ZV3D3		V3		
	3500	SPHWWAHDNL251ZU2D3	1Z	U2	D3	8617 ~
		SPHWWAHDNL251ZU3D3		U3		
	4000	SPHWWAHDNL251ZT2D3	1Z	T2	D3	8790 ~
		SPHWWAHDNL251ZT3D3		T3		
	5000	SPHWWAHDNL251ZR3D3	1Z	R3	D3	8864 ~
	5700	SPHWWAHDNL251ZQ3D3	1Z	Q3	D3	8864 ~
	6500	SPHWWAHDNL251ZP3D3	1Z	P3	D3	8790 ~
90	2700	SPHWWAHDNL271ZW2D3	1Z	W2	D3	6818 ~
		SPHWWAHDNL271ZW3D3		W3		
	3000	SPHWWAHDNL271ZV2D3	1Z	V2	D3	7172 ~
		SPHWWAHDNL271ZV3D3		V3		
	3500	SPHWWAHDNL271ZU2D3	1Z	U2	D3	7385 ~
		SPHWWAHDNL271ZU3D3		U3		
	4000	SPHWWAHDNL271ZT2D3	1Z	T2	D3	7537 ~
		SPHWWAHDNL271ZT3D3		T3		
	5000	SPHWWAHDNL271ZR3D3	1Z	R3	D3	7602 ~

※ LCo8oD(I_F = 1620 mA, T_J = 85 °C)

CRI(R _a) Min.	Nominal CCT(K)	Product Code	V _F Rank	Chrom. Bin	Flux Rank	Flux Range (Φ _v , lm)
70	3000	SPHWWAHDNM231ZV3D3	1Z	V3	D3	13409 ~
	4000	SPHWWAHDNM231ZT3D3	1Z	T3	D3	13657 ~
	5000	SPHWWAHDNM231ZR3D3	1Z	R3	D3	13906 ~
80	2700	SPHWWAHDNM251ZW2D3	1Z	W2	D3	11815 ~
		SPHWWAHDNM251ZW3D3		W3		
	3000	SPHWWAHDNM251ZV2D3	1Z	V2	D3	12416 ~
		SPHWWAHDNM251ZV3D3		V3		
	3500	SPHWWAHDNM251ZU2D3	1Z	U2	D3	12779 ~
		SPHWWAHDNM251ZU3D3		U3		
	4000	SPHWWAHDNM251ZT2D3	1Z	T2	D3	13035 ~
		SPHWWAHDNM251ZT3D3		T3		
	5000	SPHWWAHDNM251ZR3D3	1Z	R3	D3	13144 ~
	5700	SPHWWAHDNM251ZQ3D3	1Z	Q3	D3	13144 ~
	6500	SPHWWAHDNM251ZP3D3	1Z	P3	D3	13035 ~
90	2700	SPHWWAHDNM271ZW2D3	1Z	W2	D3	10111 ~
		SPHWWAHDNM271ZW3D3		W3		
	3000	SPHWWAHDNM271ZV2D3	1Z	V2	D3	10635 ~
		SPHWWAHDNM271ZV3D3		V3		
	3500	SPHWWAHDNM271ZU2D3	1Z	U2	D3	10952 ~
		SPHWWAHDNM271ZU3D3		U3		
	4000	SPHWWAHDNM271ZT2D3	1Z	T2	D3	11178 ~
		SPHWWAHDNM271ZT3D3		T3		
	5000	SPHWWAHDNM271ZR3D3	1Z	R3	D3	11273 ~

b) Chromaticity Region & Coordinates (I_F = Sorting Current, T_J = 85 °C)

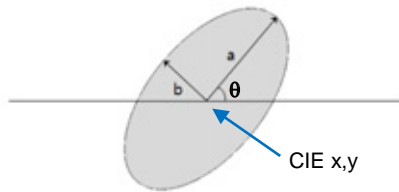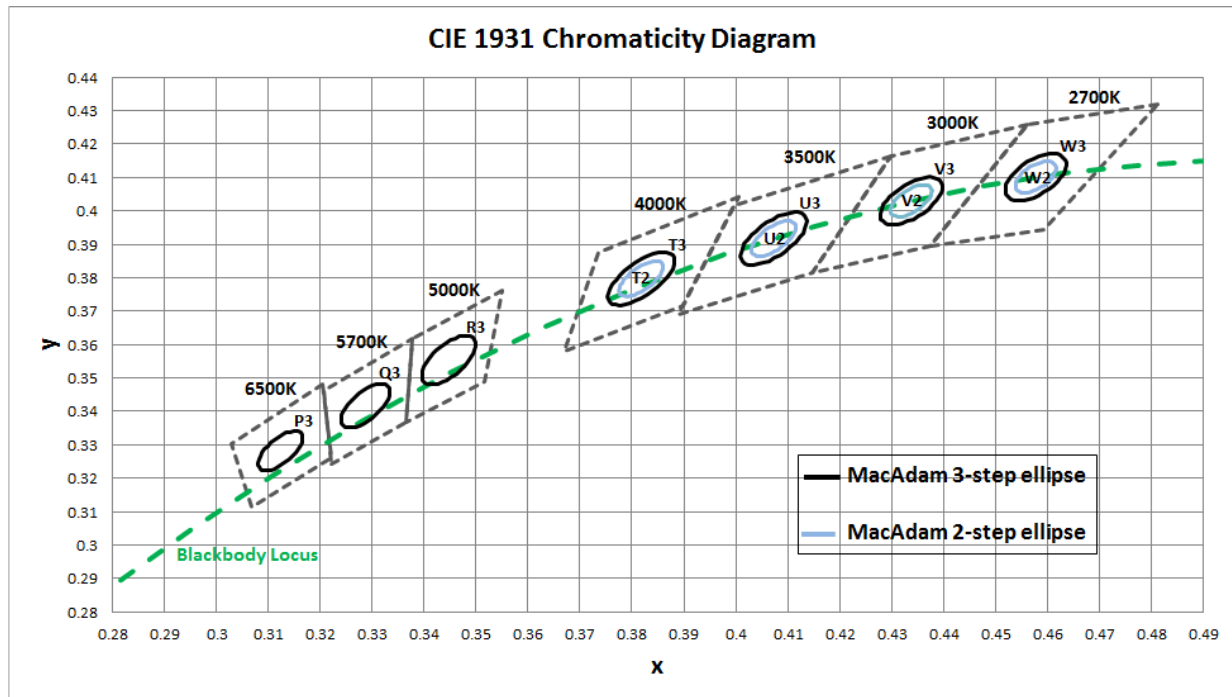

MacAdam Ellipse (W2, W3)					
Step	CIE x	CIE y	θ	a	b
2-step	0.4578	0.4101	53.70	0.0054	0.0028
3-step	0.4578	0.4101	53.70	0.0081	0.0042

MacAdam Ellipse (V2, V3)					
Step	CIE x	CIE y	θ	a	b
2-step	0.4338	0.403	53.22	0.0056	0.0027
3-step	0.4338	0.4030	53.22	0.0083	0.0041

MacAdam Ellipse (U2, U3)					
Step	CIE x	CIE y	θ	a	b
2-step	0.4073	0.3917	54.00	0.0062	0.0028
3-step	0.4073	0.3917	54.00	0.0093	0.0041

MacAdam Ellipse (T2, T3)					
Step	CIE x	CIE y	θ	a	b
2-step	0.3818	0.3797	53.72	0.0063	0.0027
3-step	0.3818	0.3797	53.72	0.0094	0.0040

MacAdam Ellipse (R3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.3447	0.3553	59.62	0.0082	0.0035

MacAdam Ellipse (Q3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.3287	0.3417	59.0950	0.0075	0.0032

MacAdam Ellipse (P3)					
Step	CIE x	CIE y	θ	a	b
3-step	0.3123	0.3282	58.5700	0.0067	0.0029


Note:

Samsung maintains measurement tolerance of: $C_x, C_y = \pm 0.005$


3. Typical Characteristics Graphs

a) Spectrum Distribution (I_f = Sorting Current, T_j = 85 °C)


CRI Ra 80+

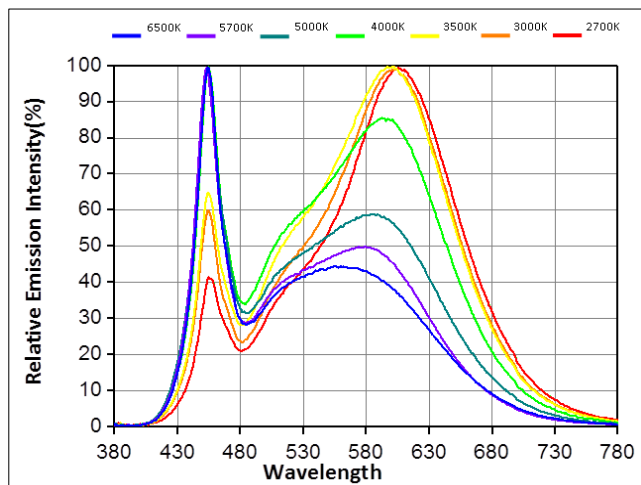

CRI Ra 90+

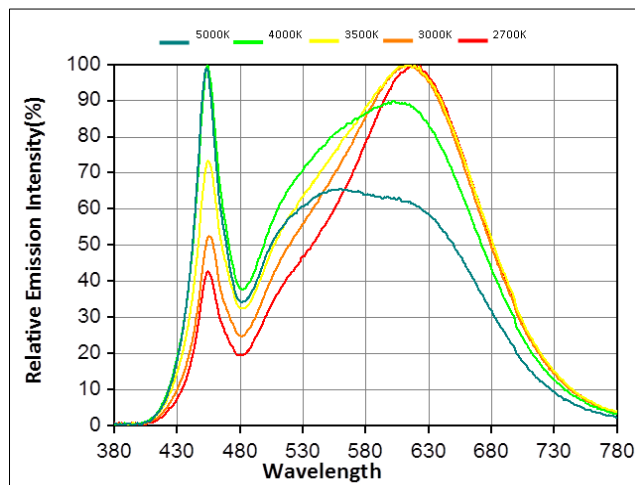


CRI Ra 70+

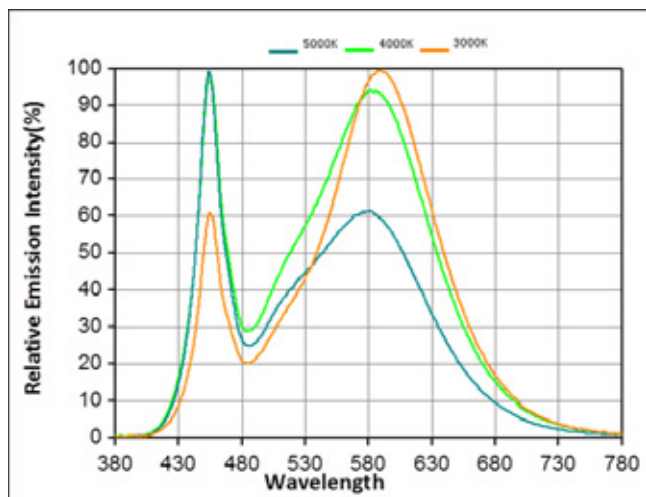


b) Forward Current Characteristics ($T_J = 85^\circ\text{C}$)


1) LC003D

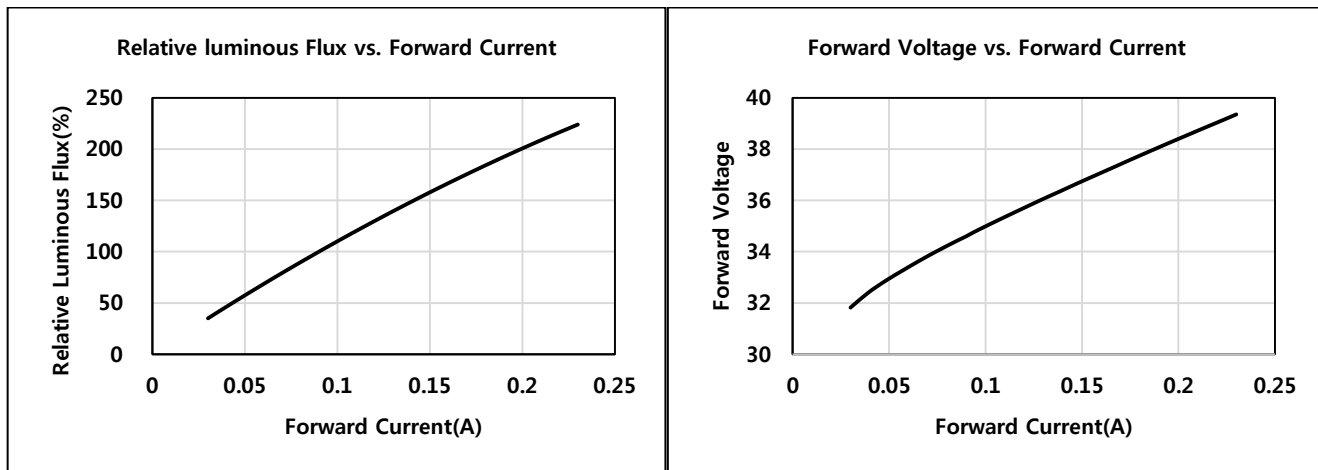


2) LC006D

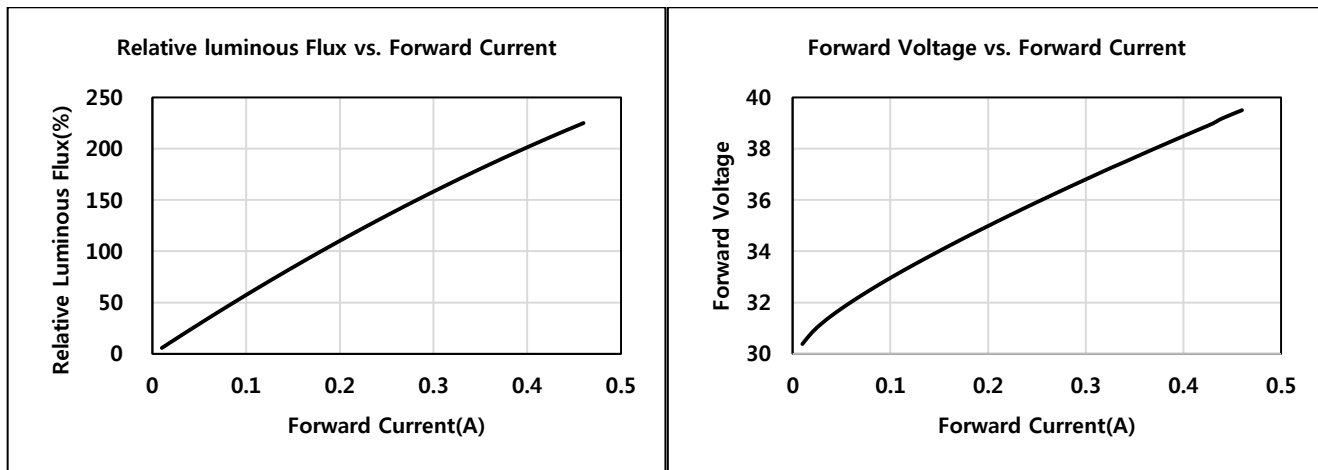


3) LC009D

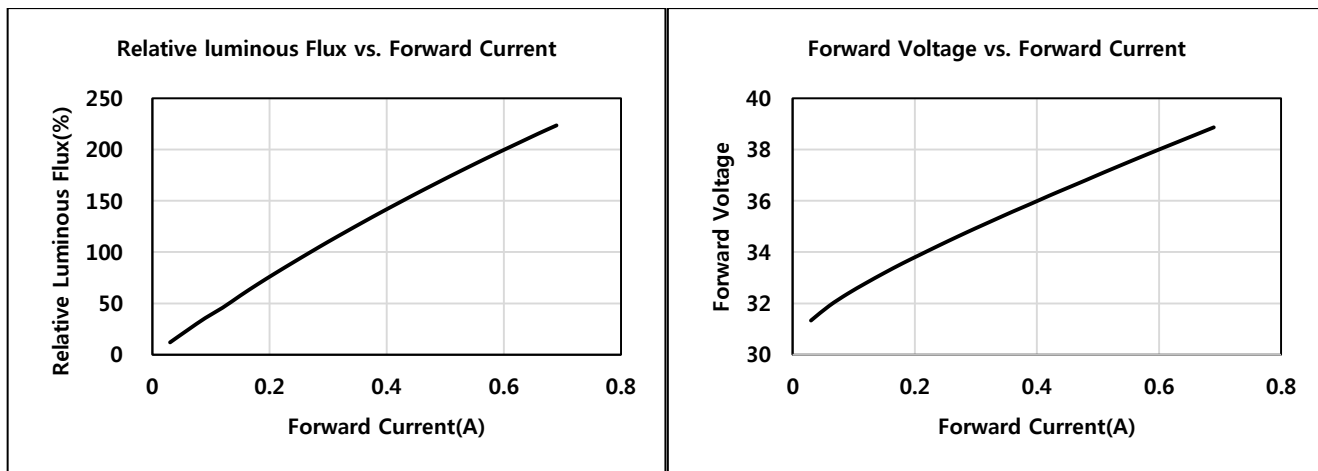


4) LC013D

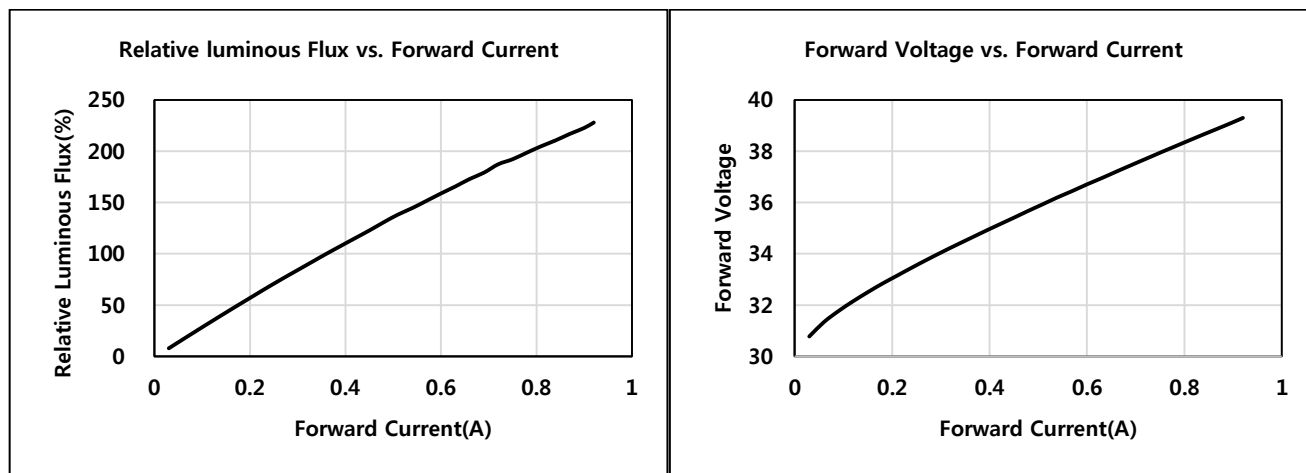


5) LC016D

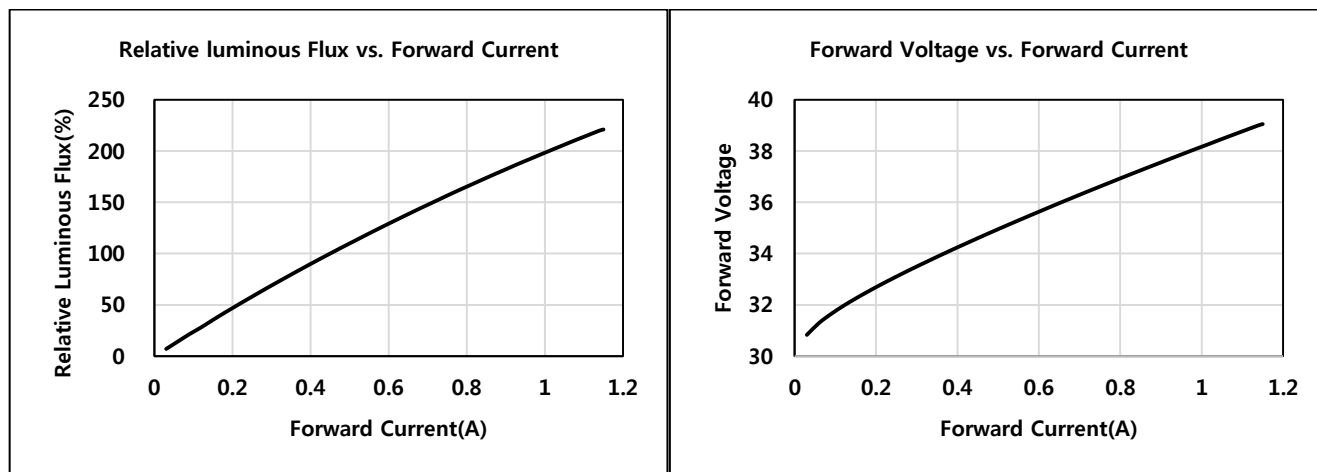


6) LC019D

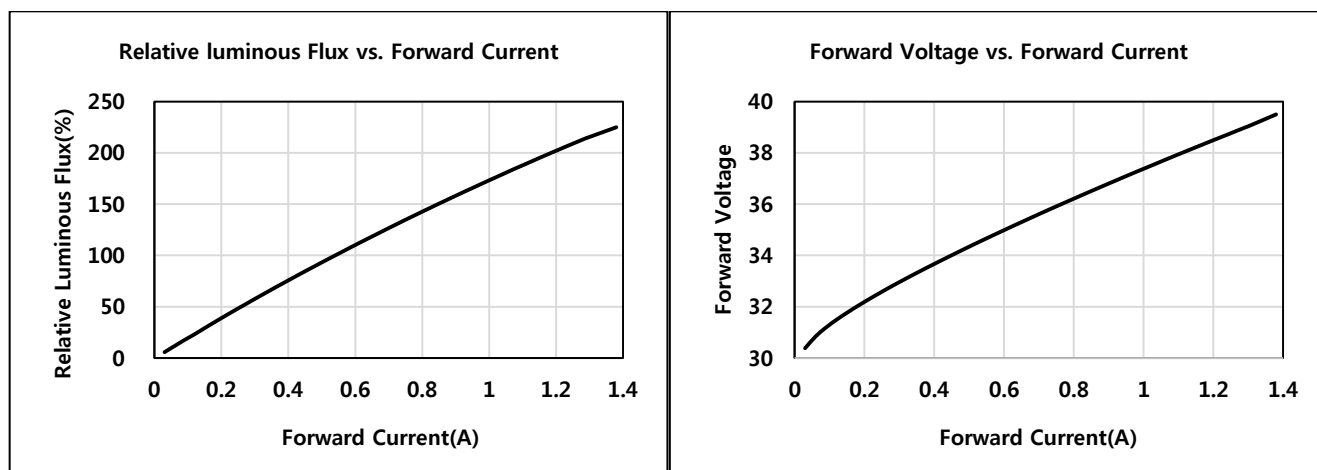


7) LC026D

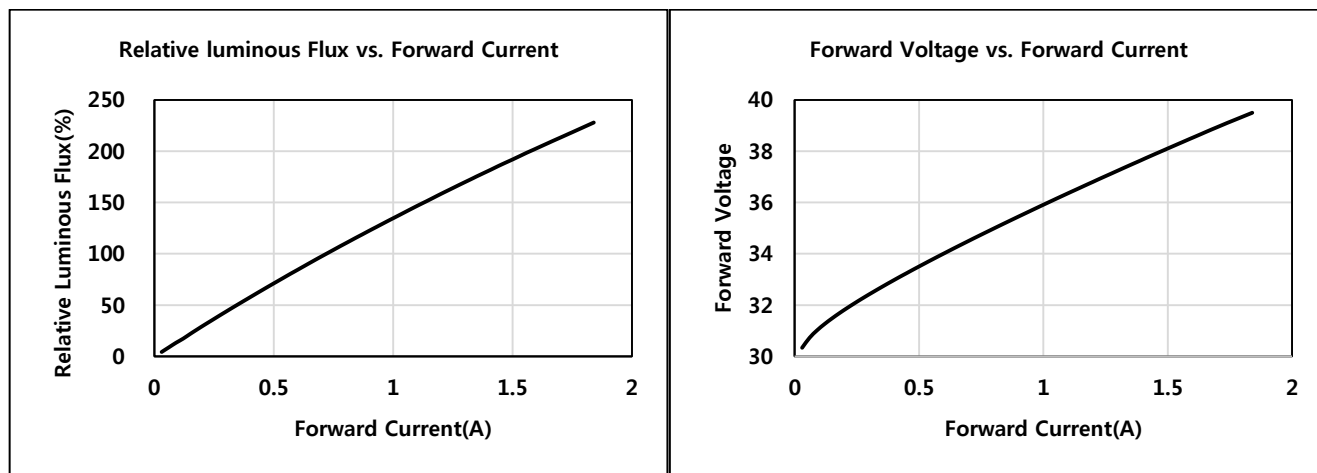


8) LC033D

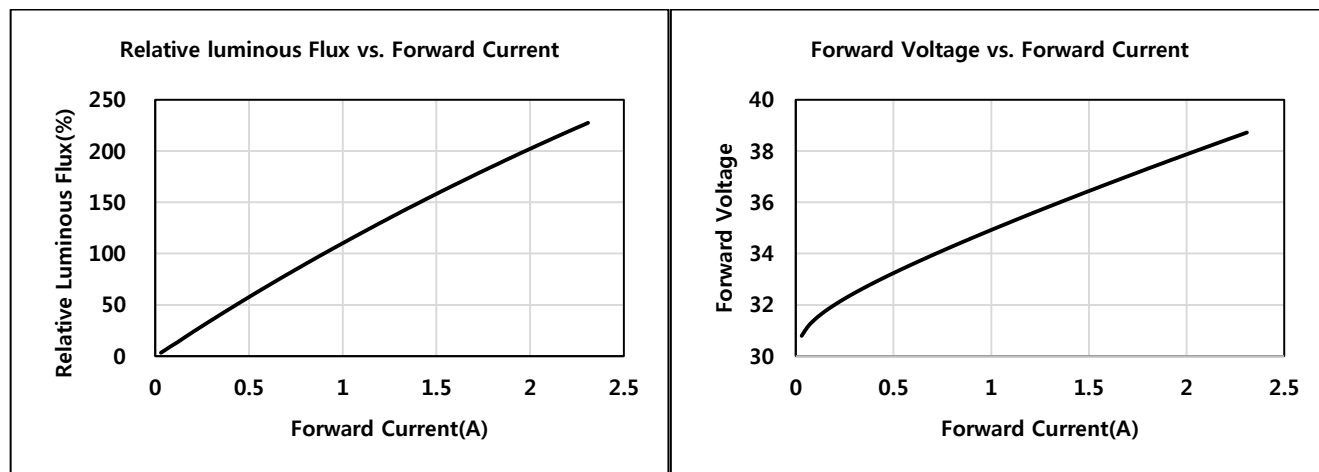


9) LC040D

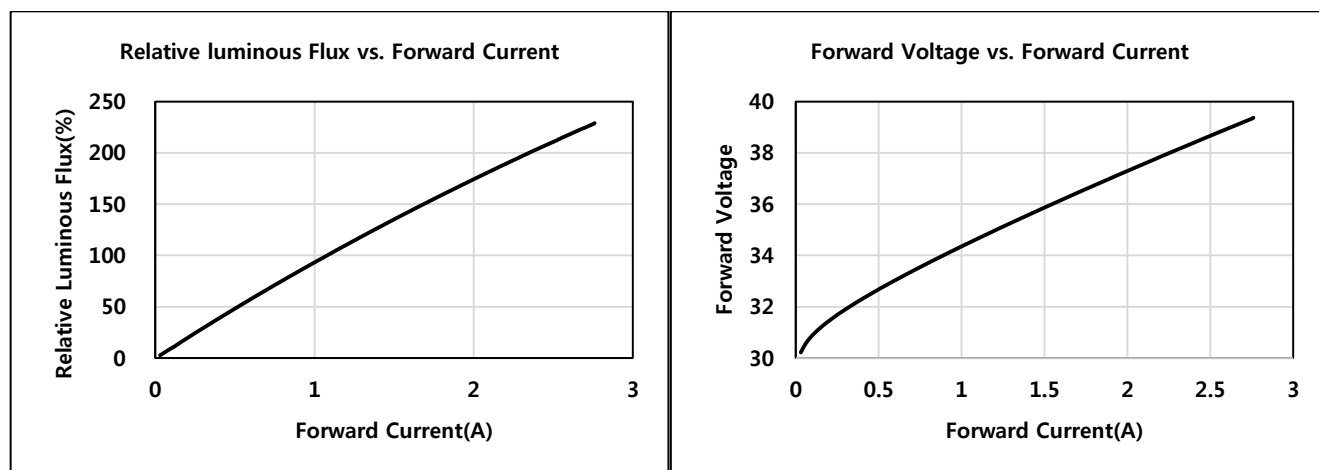


10) LC060D

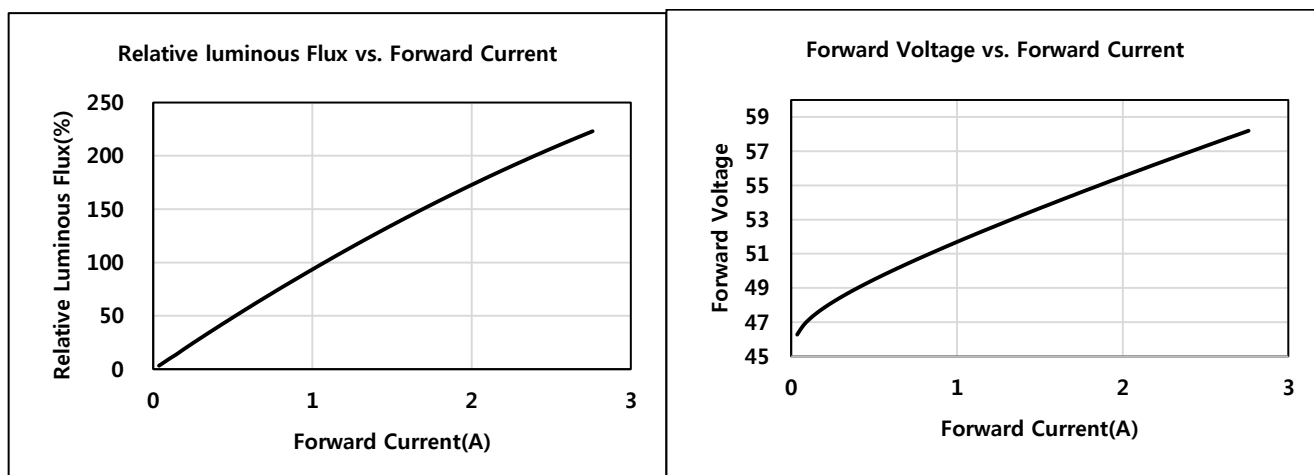


11) LC080D

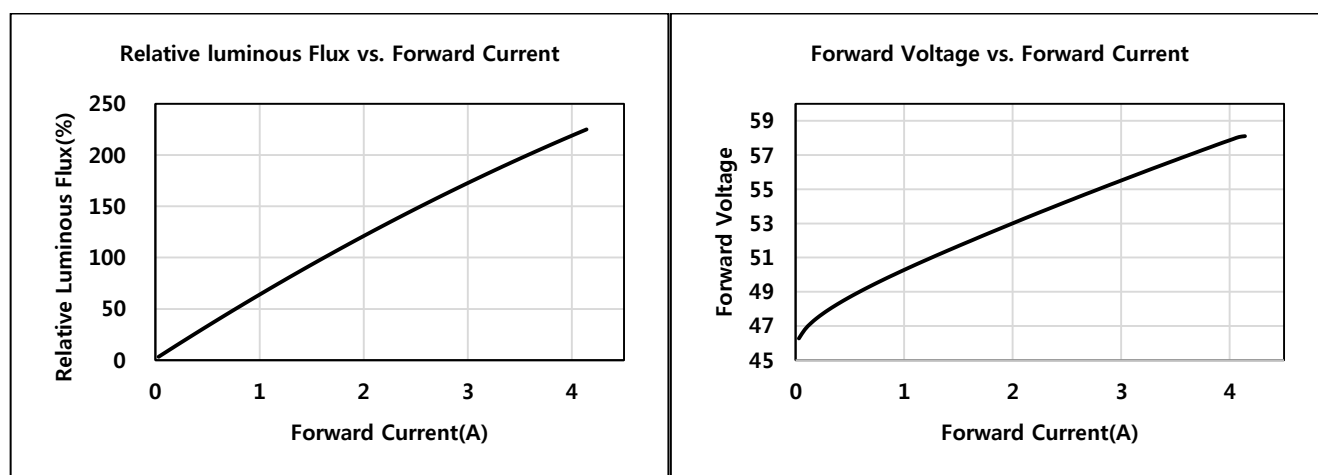


c) Temperature Characteristics(I_F = Sorting Current)

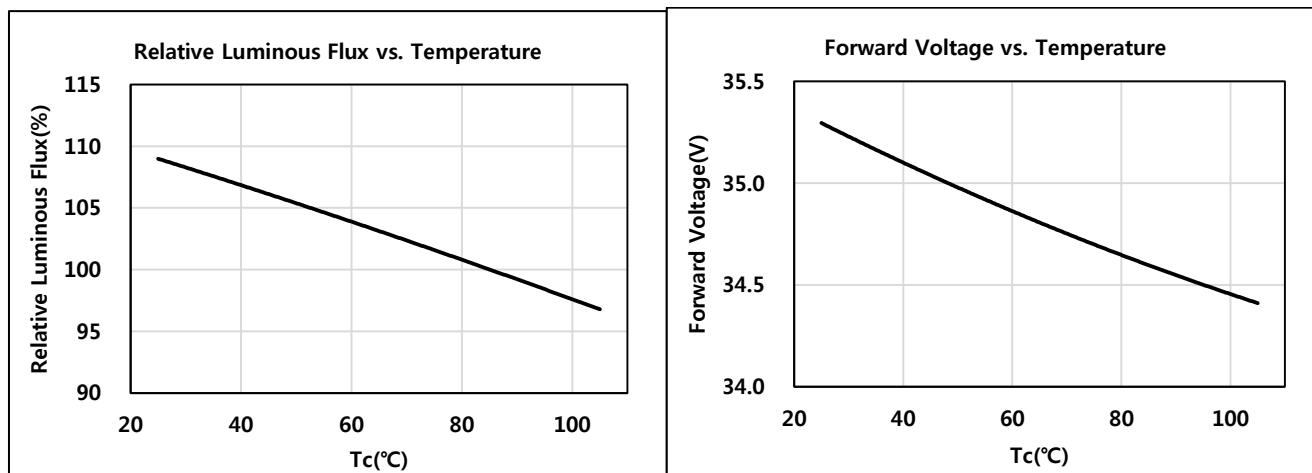

d) Color Shift Characteristics ($T_J = 85^{\circ}\text{C}$, I_F =Sorting Current, CRI = 80+)

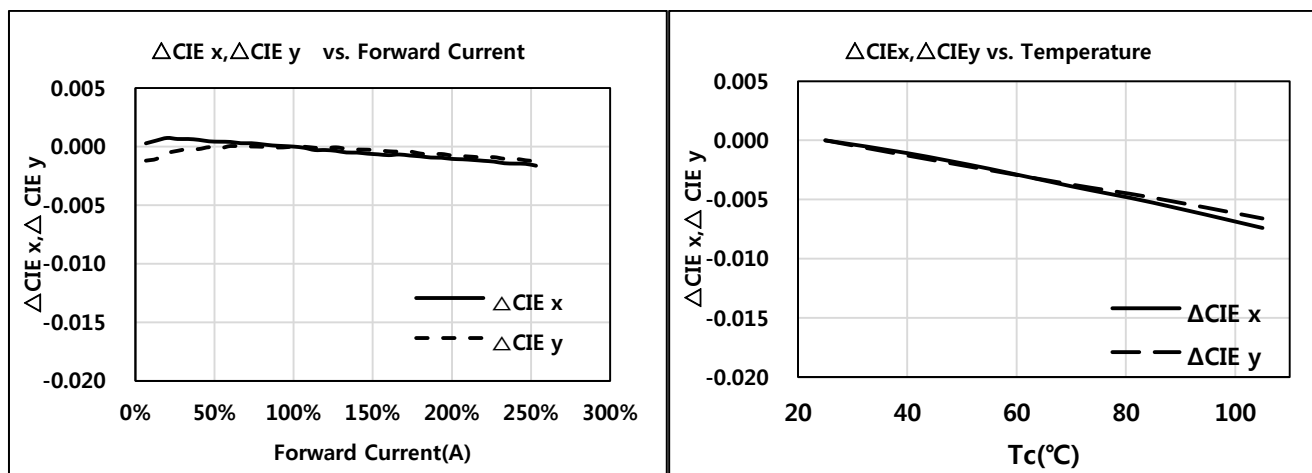


e) Beam Angle Characteristics (I_F = Sorting Current, $T_J = 85^{\circ}\text{C}$)

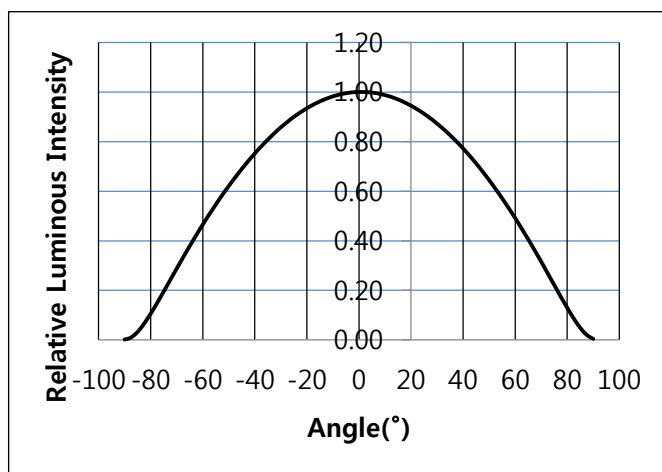


f) Derating Characteristics



1) LC003D

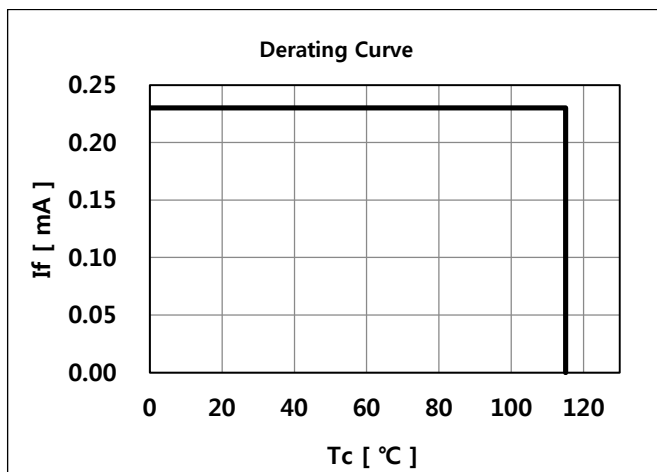


2) LC006D

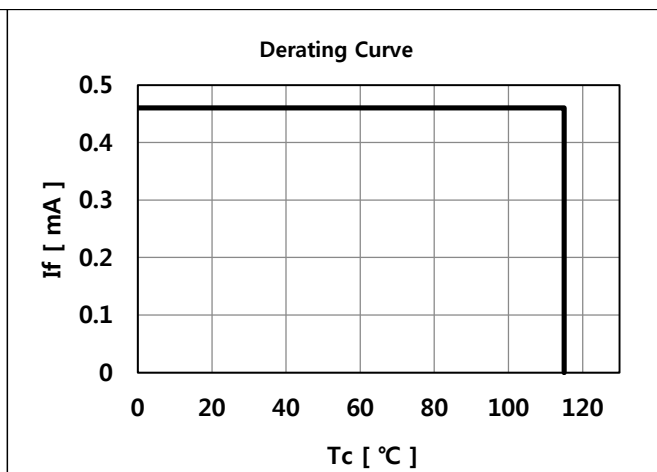


3) LC009D4) LC0013D

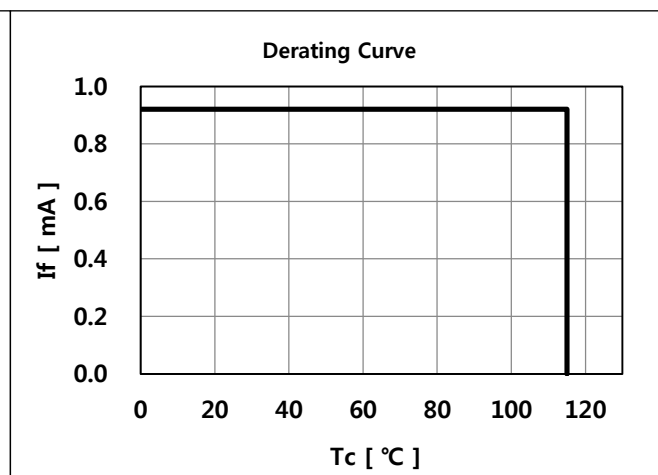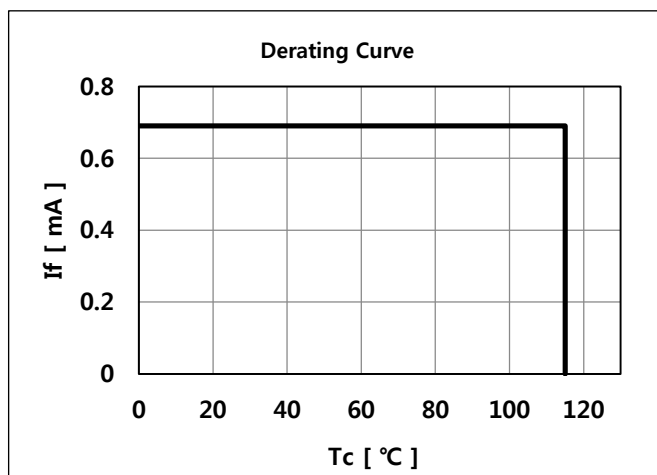


5) LC016D

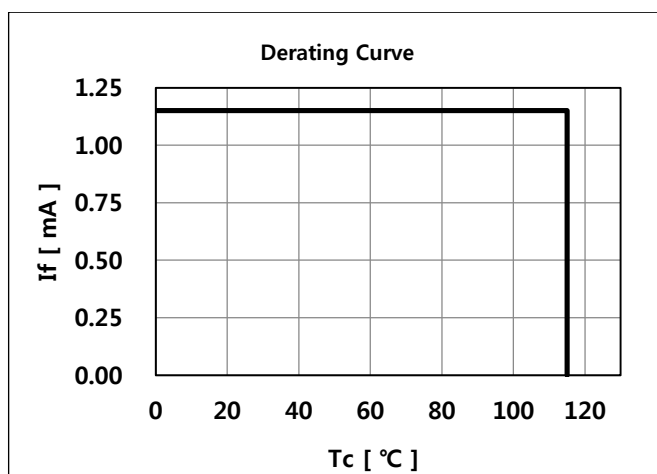


6) LC0019D

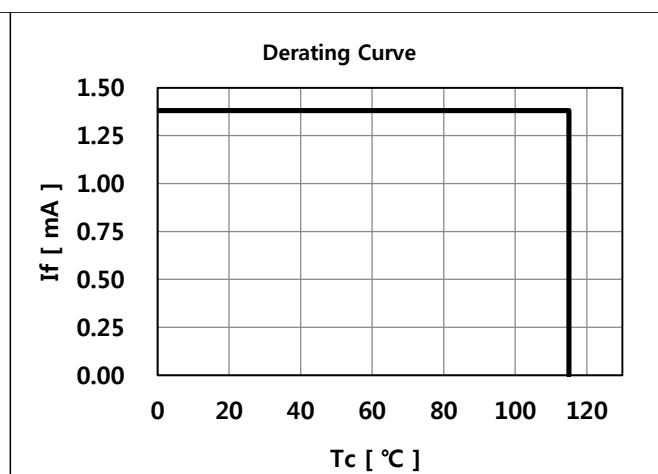


7) LC026D

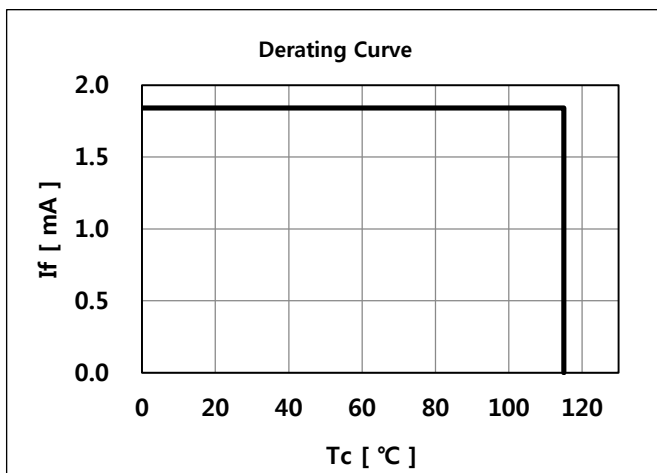


8) LC0033D

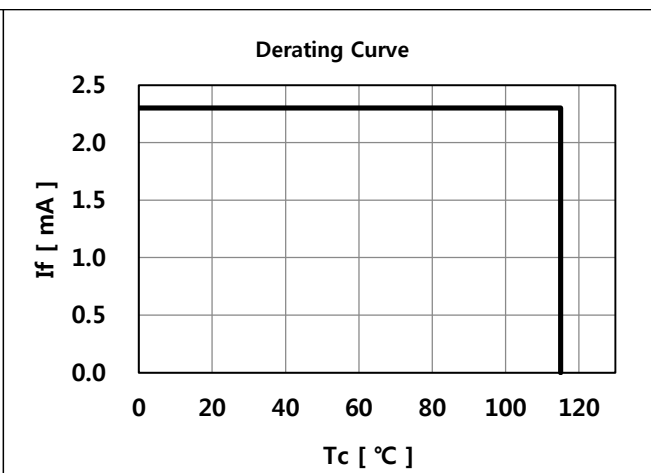


9) LC040D

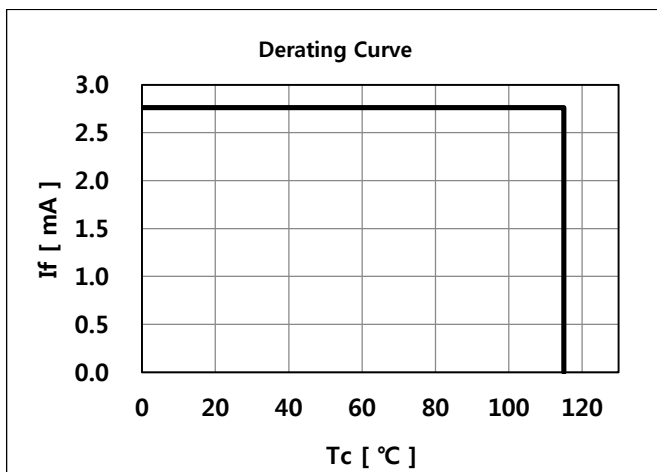

10) LC060D

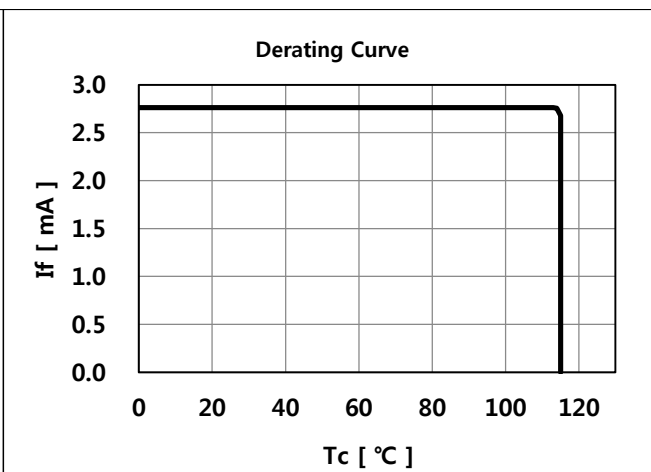


11) LC080D

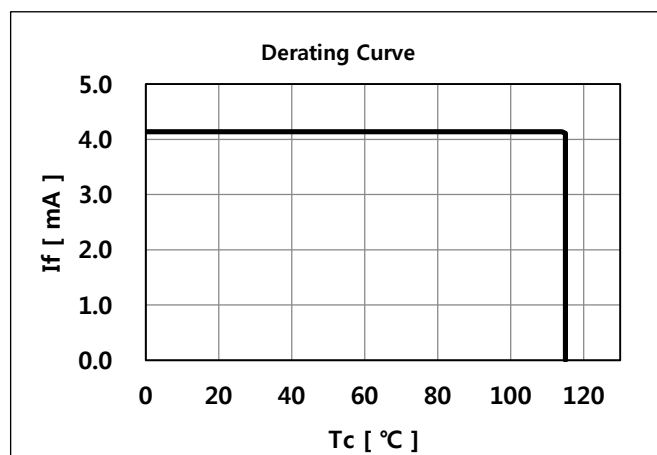

4. Outline Drawing & Dimension

※ Model : LC003D, LC006D, LC009D, LC013D

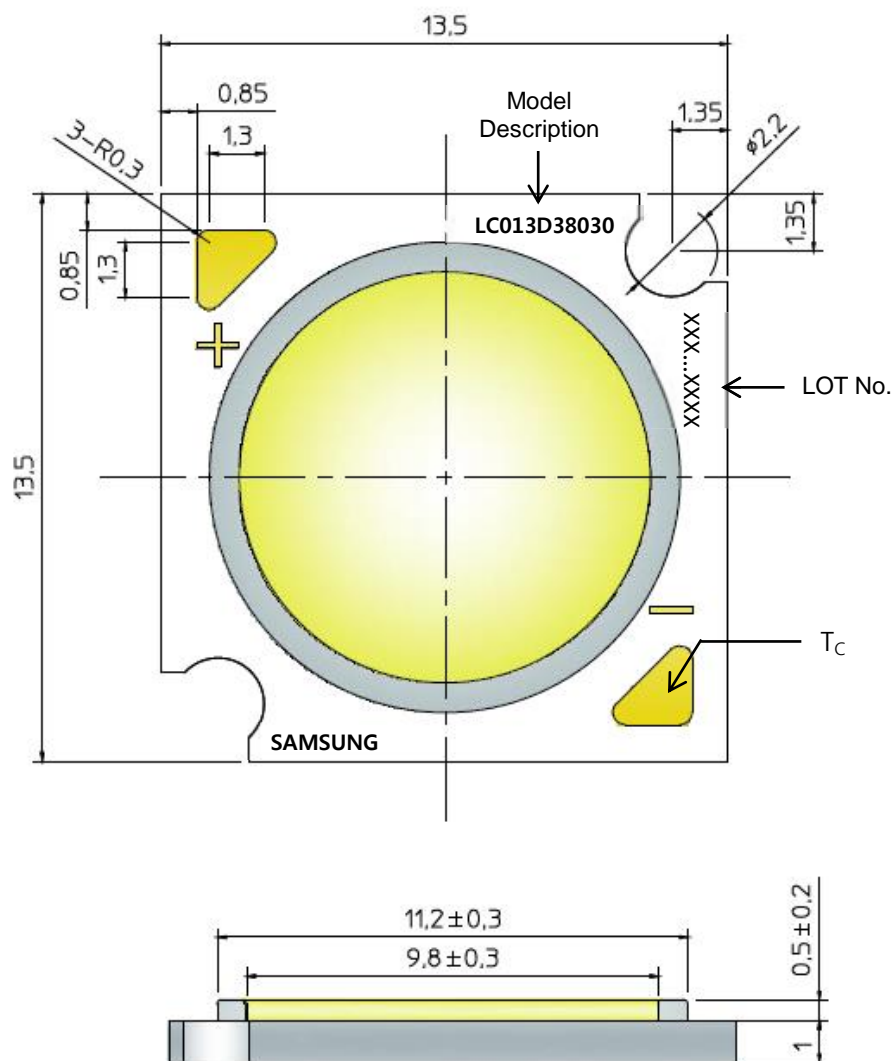


1. Unit: mm
2. Tolerance: ± 0.3 mm

Item	Dimension	Tolerance	Unit
Length	13.5	±0.30	mm
Width	13.5	±0.30	mm
Height	1.50	±0.20	mm
Light Emitting Surface (LES) Diameter	9.8	±0.30	mm

Note: Denoted product information above is only an example
(LC013D38030 :LC013D, Gen3, Ra80, 3000K)

※ Model : LC016D, LC019D, LC026D, LC033D

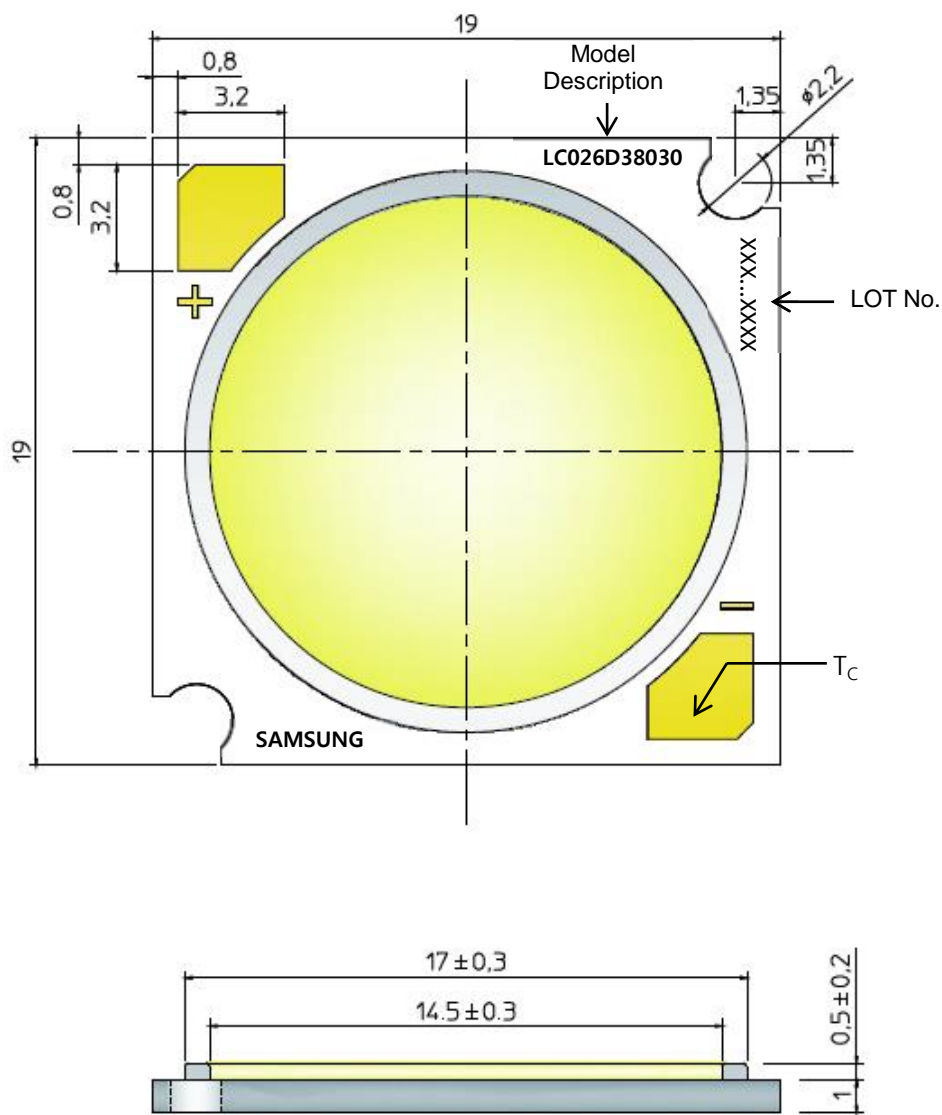


1. Unit: mm
2. Tolerance: ± 0.3 mm

Item	Dimension	Tolerance	Unit
Length	19.0	± 0.30	mm
Width	19.0	± 0.30	mm
Height	1.50	± 0.20	mm
Light Emitting Surface (LES) Diameter	14.5	± 0.30	mm

Note: Denoted product information above is only an example
(LC026D38030 : LC026D, Gen3, CRI80+, 3000K)

※ Model : LC040D, LC060D, LC080D

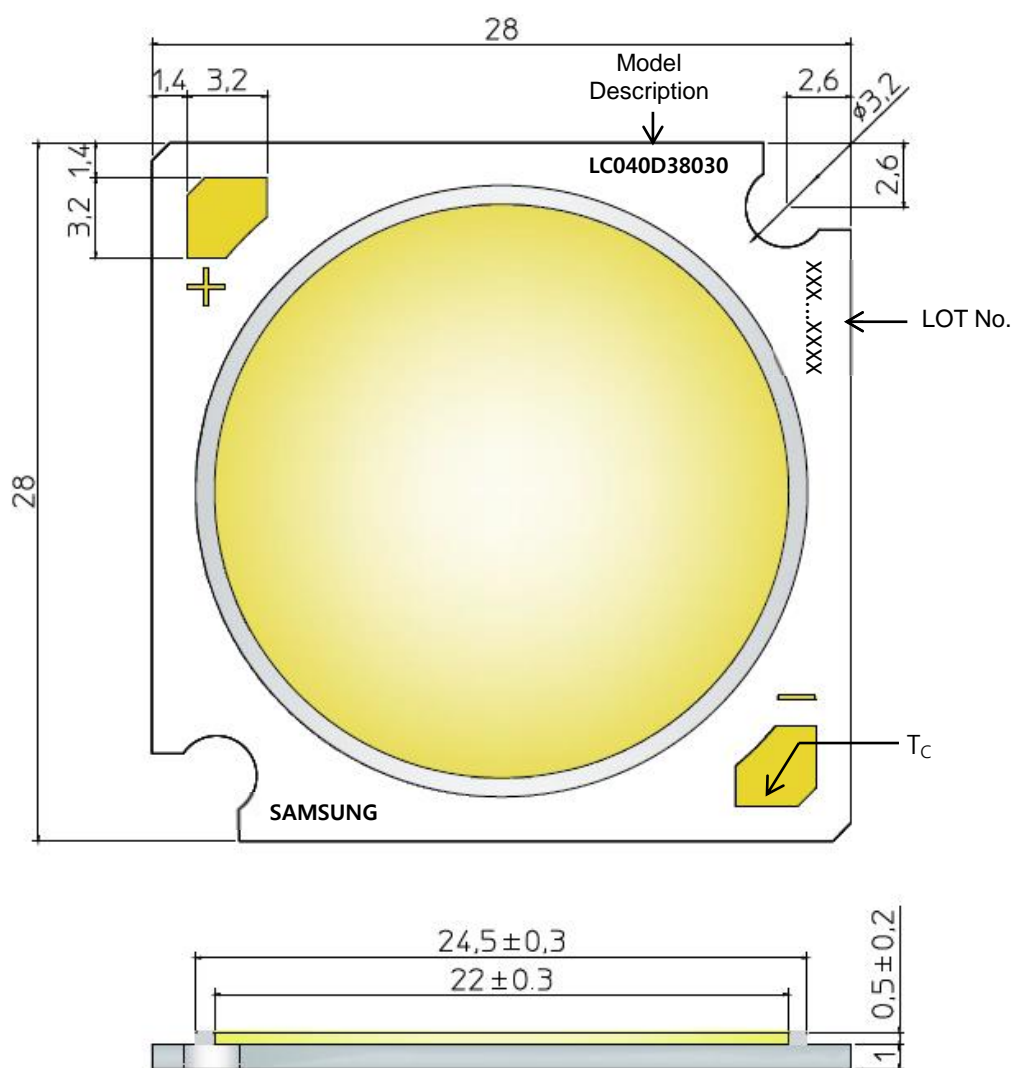

1. Unit: mm
2. Tolerance: ± 0.3 mm

Item	Dimension	Tolerance	Unit
Length	28.0	± 0.30	mm
Width	28.0	± 0.30	mm
Height	1.50	± 0.20	mm
Light Emitting Surface (LES) Diameter	22.0	± 0.30	mm

Note: Denoted product information above is only an example
(LC040D38030 : LC040D, Gen3, CRI80+, 3000K)

5. Reliability Test Items & Conditions

a) Test Items


Test Item	Test Condition	Test Hour / Cycle
Wet High Temperature Operating Life Test (WHTOL)	60 °C, 90 % RH., DC Derating, I_F	1000 h
High Temperature Operating Life Test (HTOL)	85 °C, DC Derating, I_F	1000 h
Low Temperature Operating Life Test (LTOL)	-40 °C, DC, Derating I_F	1000 h
High Temperature Storage	110 °C	1000 h
Low Temperature Storage	-40 °C	1000 h
Wet High Temperature Storage Test	85°C, 85% RH	1000h
Temperature Cycling	-45 °C / 15min ~ 125 °C / 15min Temperature change within 5min	500 cycle
Powered Temperature Cycle (PTC)	-40 °C / 85 °C each 10 min, 20 min transfer power on/off each 5 min, DC Derating, I_F = max	100 cycles
ESD (HBM)	R_1 : 10 M Ω R_2 : 1.5 k Ω C: 100 pF V: ± 2 kV	5 times
ESD (MM)	R_1 : 10 M Ω R_2 : 0 k Ω C: 200 pF V: ± 0.5 kV	5 times
Vibrations Variable Frequency	20~ 80 Hz (displacement: 0.06 inch, max. 20 g) 80 ~ 2 kHz (max. 20 g) min. frequency \leftrightarrow max. frequency 4 min transfer	4 times
Mechanical Shock Test	1500g, 0.5 ms each of the 6 surfaces (3 axis x 2 sides)	5 times
Hydrogen Sulphide(H ₂ S)	25 °C 75%R.H. H ₂ S concentration 15ppm	504h

b) Criteria for Judging the Damage

Item	Symbol	Test Condition ($T_c = 25^\circ\text{C}$)	Limit	
			Min.	Max.
Forward Voltage	V_F	I_F = Sorting Current	L.S.L. * 0.9	U.S.L. * 1.1
Luminous Flux	Φ_v	I_F = Sorting Current	L.S.L * 0.7	U.S.L * 1.3

6. Label Structure

a) Label Structure

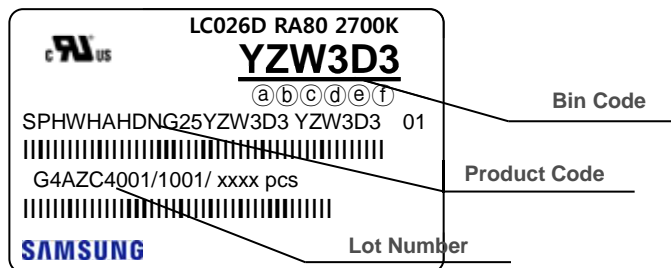

Note: Denoted bincode and product code above is only an example (see description on page 5)

Bin Code:


ⒶⒷ: Forward Voltage bin (refer to page 9)

ⒸⒹ: Chromaticity bin (refer to page 21)

ⒺⒻ: Luminous Flux bin (refer to page 5-8)

b) Lot Number

The lot number is composed of the following characters:

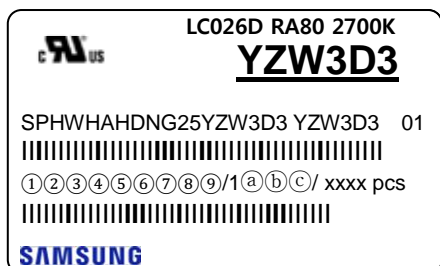

① ③④⑤⑥⑦⑧⑨ / 1 Ⓐ Ⓑ Ⓒ / xxxx pcs

① : Production site (S: Giheung, Korea, G: Tianjin, China)

② : 4(LED)

③ : Product state (A: Normal, B: Bulk, C: First Production, R: Reproduction, S: Sample)

④ : Year (Z: 2015, A: 2016, B: 2017...)

⑤ : Month (1~9, A, B, C)

⑥⑦⑧⑨ : Day (1~9, A, B~V)


Ⓐ Ⓑ Ⓒ : Product serial number (001 ~ 999)

7. Packing Structure


※ Model : L003D, LC006D, LC009D, LC013D

Packing material	Max. quantity in pcs of COB	Dimension(mm)			
		Length	Width	Height	Tolerance
Tray	50	200	200	8	1
Anti-Static Bag	250 (5 trays)	320	270	-	+/- 0.5
Outer Box (Small)	500 (2 bags)	225	225	65	5
Outer Box (Middle)	1000 (4 bags)	225	225	130	5

a) Packing Structure

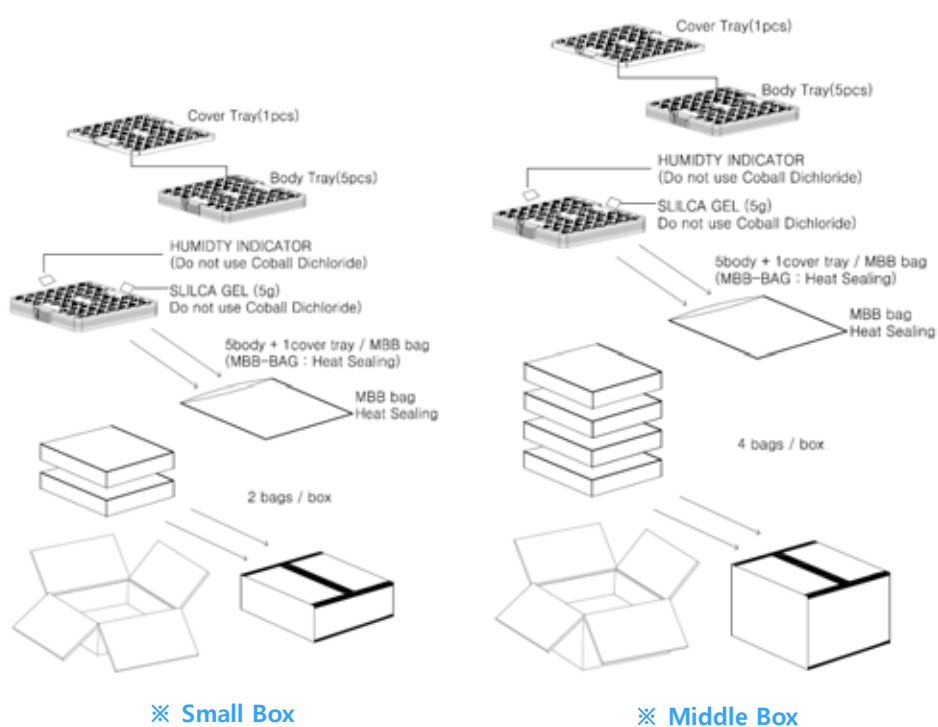


b) Tray

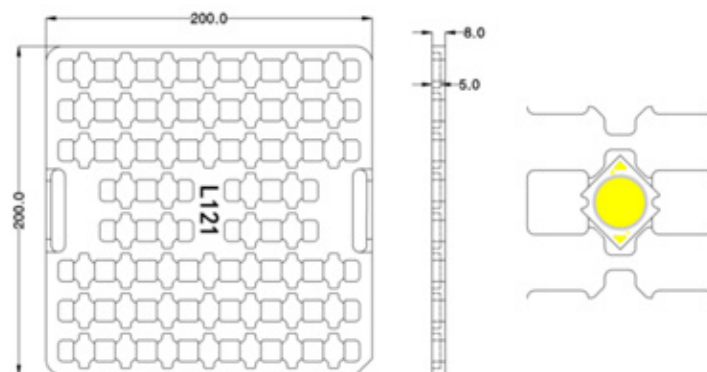

※ Model : LC016D, LC019D, LC026D, LC033D

Packing material	Max. quantity in pcs of COB	Dimension(mm)			
		Length	Width	Height	Tolerance
Tray	25	200	200	8	1
Anti-Static Bag	125 (5 trays)	320	270	-	+/- 0.5
Outer Box (Small)	250 (2 bags)	225	225	65	5
Outer Box (Middle)	500 (4 bags)	225	225	130	5


a) Packing Structure

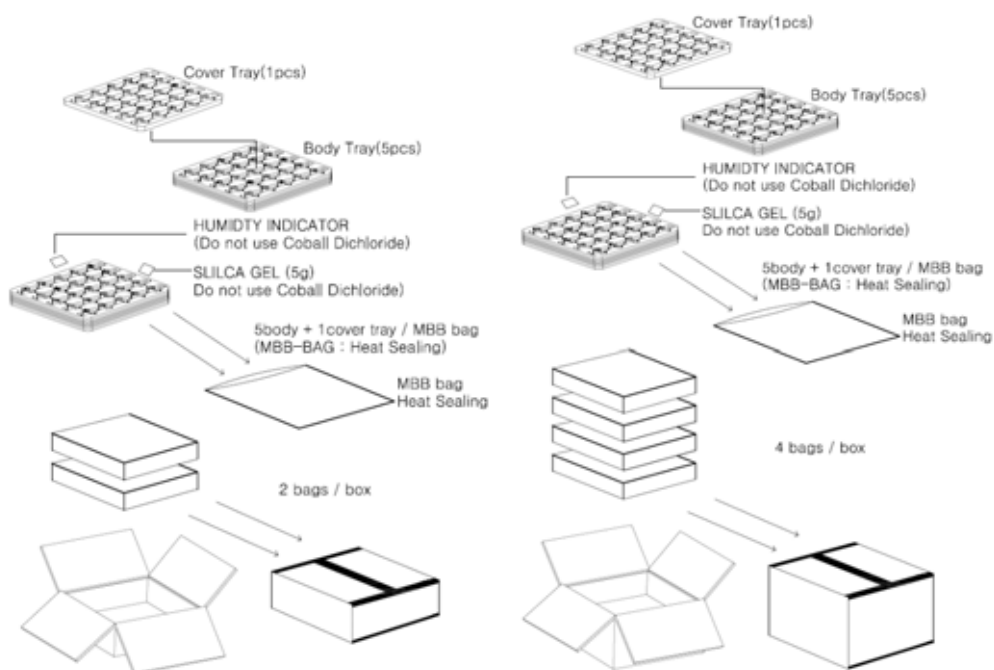

※ Small Box

※ Middle Box


b) Tray

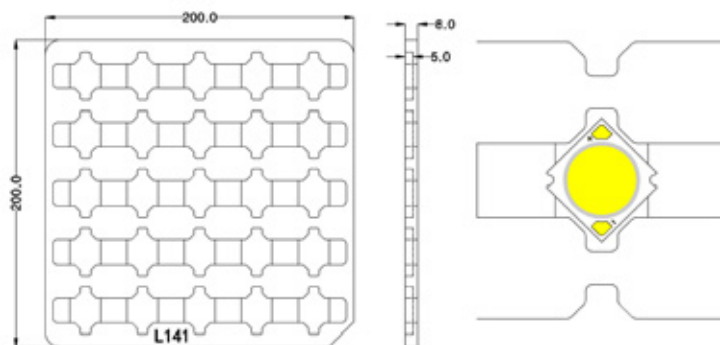


※ Model : LC040D, LC060D, LC080D

Packing material	Max. quantity in pcs of COB	Dimension(mm)			
		Length	Width	Height	Tolerance
Tray	16	200	200	8	1
Anti-Static Bag	80 (5 trays)	320	270	-	+/- 0.5
Outer Box (Small)	160 (2 bags)	225	225	65	5
Outer Box (Middle)	320 (4 bags)	225	225	130	5

a) Packing Structure

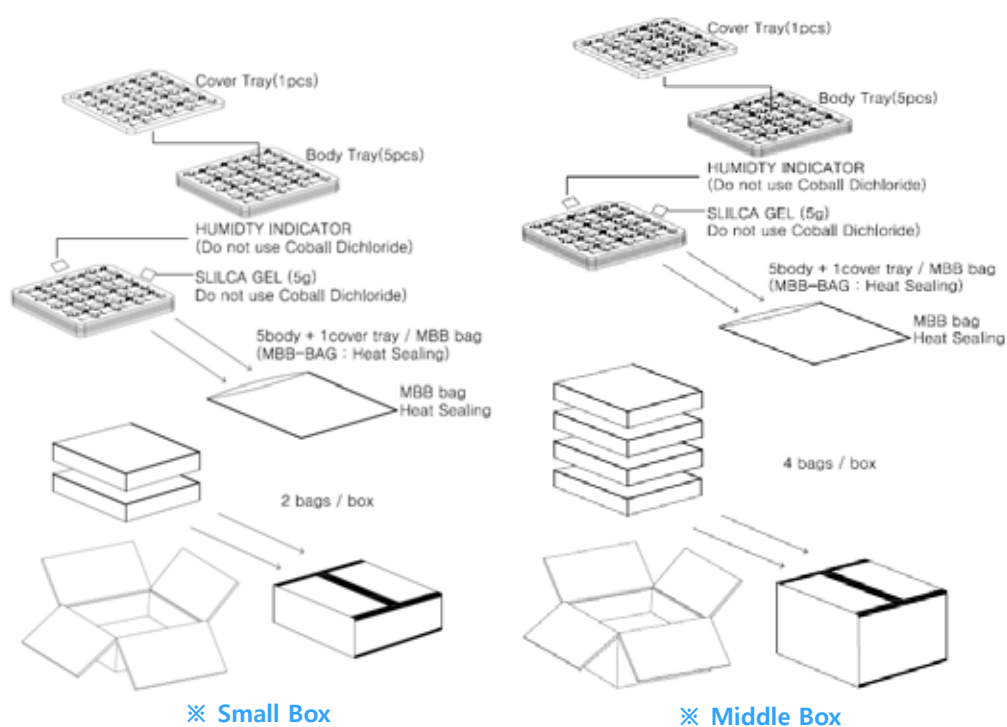


b) Tray

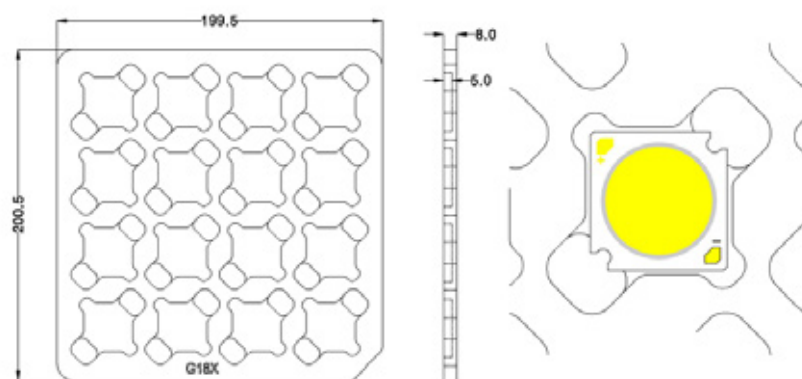

8. Precautions in Handling & Use

- 1) This device should not be used in any type of fluid such as water, oil, organic solvent, etc. When cleaning is required, IPA is recommended as the cleaning agent. Some solvent-based cleaning agent may damage the silicone resins used in the device.
- 2) LEDs must be stored in a clean environment. If the LEDs are to be stored for three months or more after being shipped from Samsung, they should be packed with a nitrogen-filled container (shelf life of sealed bags is 12 months at temperature 0~40 °C, 0~90 % RH).
- 3) After storage bag is opened, device subjected to soldering, solder reflow, or other high temperature processes must be:
 - a. Mounted within 672 hours (28 days) at an assembly line with a condition of no more than 30 °C / 60 % RH, or
 - b. Stored at <10 % RH
- 4) Repack unused products with anti-moisture packing, fold to close any opening and then store in a dry place.
- 5) Devices require baking before mounting, if humidity card reading is >60 % at 23 ± 5 °C.
- 6) Devices must be baked for 1 hour at 60 ± 5 °C, if baking is required.
- 7) The LEDs are sensitive to the static electricity and surge current. It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs. If voltage exceeding the absolute maximum rating is applied to LEDs, it may cause damage or even destruction to LED devices. Damaged LEDs may show some unusual characteristics such as increase in leakage current, lowered turn-on voltage, or abnormal lighting of LEDs at low current.
- 8) The thermal management is one of the most critical factors for the LED lighting system. Especially the LED junction temperature should not exceed the absolute maximum rating while operation of LED lighting system.
For more information, please refer to Application Note 'Mechanical & Thermal Guide for COB'.
- 9) In case of driving LEDs around the minimum current level (I_{f_min}), chips might exhibit different brightness due to the variation in I-V characteristics of each one. This is normal and does not adversely affect the performance of product.
- 10) VOCs (Volatile Organic Compounds) can be generated from adhesives, flux, hardener or organic additives used in luminaires (fixtures). Transparent LED silicone encapsulant is permeable to those chemicals and they may lead to a discoloration of encapsulant when they exposed to heat or light. This phenomenon can cause a significant loss of light emitted (output) from the luminaires. In order to prevent these problems, we recommend users to know the physical properties of materials used in luminaires and they must be carefully selected.
- 11) The resin area is very sensitive, please do not handle, press, touch, rub, clean, or pick by with tweezers on it. Instead, please pick at the handling area as indicated below.

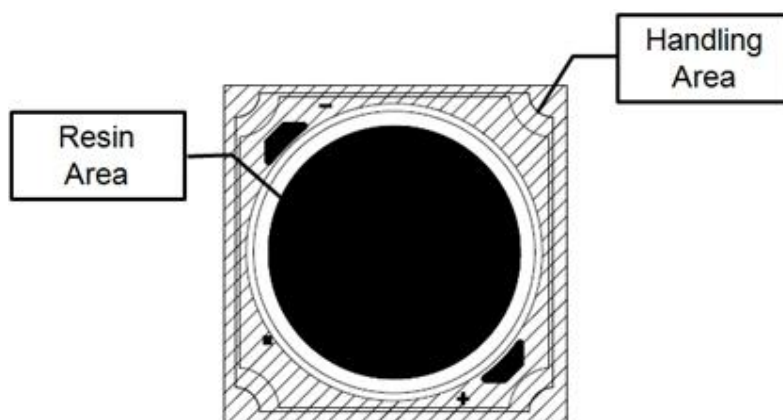

Legal and additional information.

[About Samsung Electronics Co., Ltd.](#)

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies, redefining the worlds of TVs, smartphones, wearable devices, tablets, cameras, digital appliances, printers, medical equipment, network systems and semiconductors. We are also leading in the Internet of Things space through, among others, our Digital Health and Smart Home initiatives. We employ 307,000 people across 84 countries. To discover more, please visit our official website at www.samsung.com and our official blog at global.samsungtomorrow.com.

Copyright © 2015 Samsung Electronics Co., Ltd. All rights reserved.
Samsung is a registered trademark of Samsung Electronics Co., Ltd.
Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.
95, Samsung 2-ro
Giheung-gu
Yongin-si, Gyeonggi-do, 446-711
KOREA

www.samsungled.com

SAMSUNG