

GLADY



Faretto LED da incasso, caratterizzato da un design ultra-sottile progettato principalmente per installazioni in controsoffitti con spazi d'incasso estremamente ridotti. Grazie alla tecnologia Backlit, offre un'illuminazione perfettamente omogenea, rendendolo ideale per uffici, corridoi, spazi commerciali.

Corpo: struttura ultra-piatta in polycarbonato di alta qualità, leggera e robusta. Dotato di molle in acciaio pre-assemblate per un fissaggio rapido "push-in" senza l'uso di attrezzi.

Ottiche: diffusore opale con fascio di apertura ampio 110°, ottimizzato per una diffusione della luce morbida.

Riflettore: cornice integrata con grado di protezione IP44 sulla superficie visibile e resistenza agli urti IK03, garantendo durata e protezione nel tempo.

Moduli LED: tecnologia di ultima generazione ad alta efficienza. Il sistema è dotato di CCT Switch sul retro, che permette di selezionare la tonalità di luce desiderata durante l'installazione.

Temperatura di colore: selezionabile tra 3000K, 4000K e 5500K. CRI >80.

Durata utile: 50.000h L70B50 @ta 25°C.

Alimentazione Esterna: funzionamento in corrente costante (250mA, 350mA o 500mA in base alla dimensione), con driver esterno dedicato che assicura una luce priva di sfarfallio (flicker-free).

Foro incasso cartongesso: disponibile per diametri di foratura standard da 100 mm, 150 mm e 200 mm.

Efficienza Luminosa
Luminous Efficacy

up to 165lm/W

LED Recessed Downlight, featuring an ultra-slim design engineered primarily for ceiling installations with extremely limited recessed space. Thanks to its Backlit technology, it provides perfectly homogeneous illumination, making it ideal for offices, corridors, and commercial spaces.

Housing: ultra-flat structure made of high-quality polycarbonate, both lightweight and robust. Equipped with pre-assembled steel springs for quick, tool-free "push-in" installation.

Diffuser: opal diffuser with a wide 110° beam angle, optimized for soft, uniform light distribution.

Reflector: integrated trim with IP44 protection on the visible surface and IK03 impact resistance, ensuring long-term durability and protection.

LED modules: latest generation high-efficiency technology. The system features a CCT Switch on the back, allowing the selection of the desired color temperature during installation.


Color temperature: selectable between 3000K, 4000K, and 5500K. CRI >80.

Expected lifetime: 50,000h L70B50 @ta 25°C.

External Power supply: constant current operation (250mA, 350mA, or 500mA depending on size), with a dedicated external driver ensuring flicker-free light.

Cardboard hole dimensions: available for standard drilling diameters: 100 mm, 150 mm, and 200 mm.


SIMBOLOGIA / SIMBOLOGY 4-5

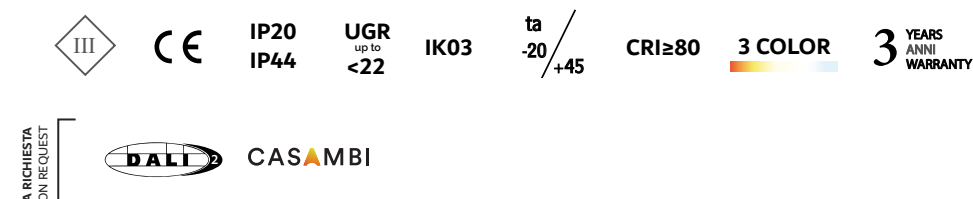

OPZIONI DI INSTALLAZIONE / INSTALLATION OPTIONS




TEMPERATURA COLORE / COLOUR TEMPERATURE

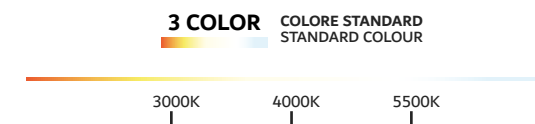

DISPONIBILI A RICHIESTA / AVAILABLE ON REQUEST

- driver dimmerabile DALI;
- driver Casambi;
- emergenza 3h esterna.
- DALI dimmable driver;
- Casambi driver;
- external emergency 3h.

VERSIONI DISPONIBILI / AVAILABLE VERSIONS



COLORI DISPONIBILI / AVAILABLE COLOURS

W COLORE STANDARD
STANDARD COLOUR
Bianco
White

DIMENSIONI / DIMENSIONS




Fig.1




Fig.2


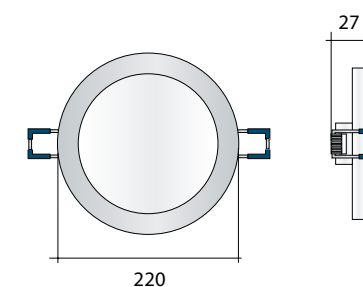


Fig.3

[mm]

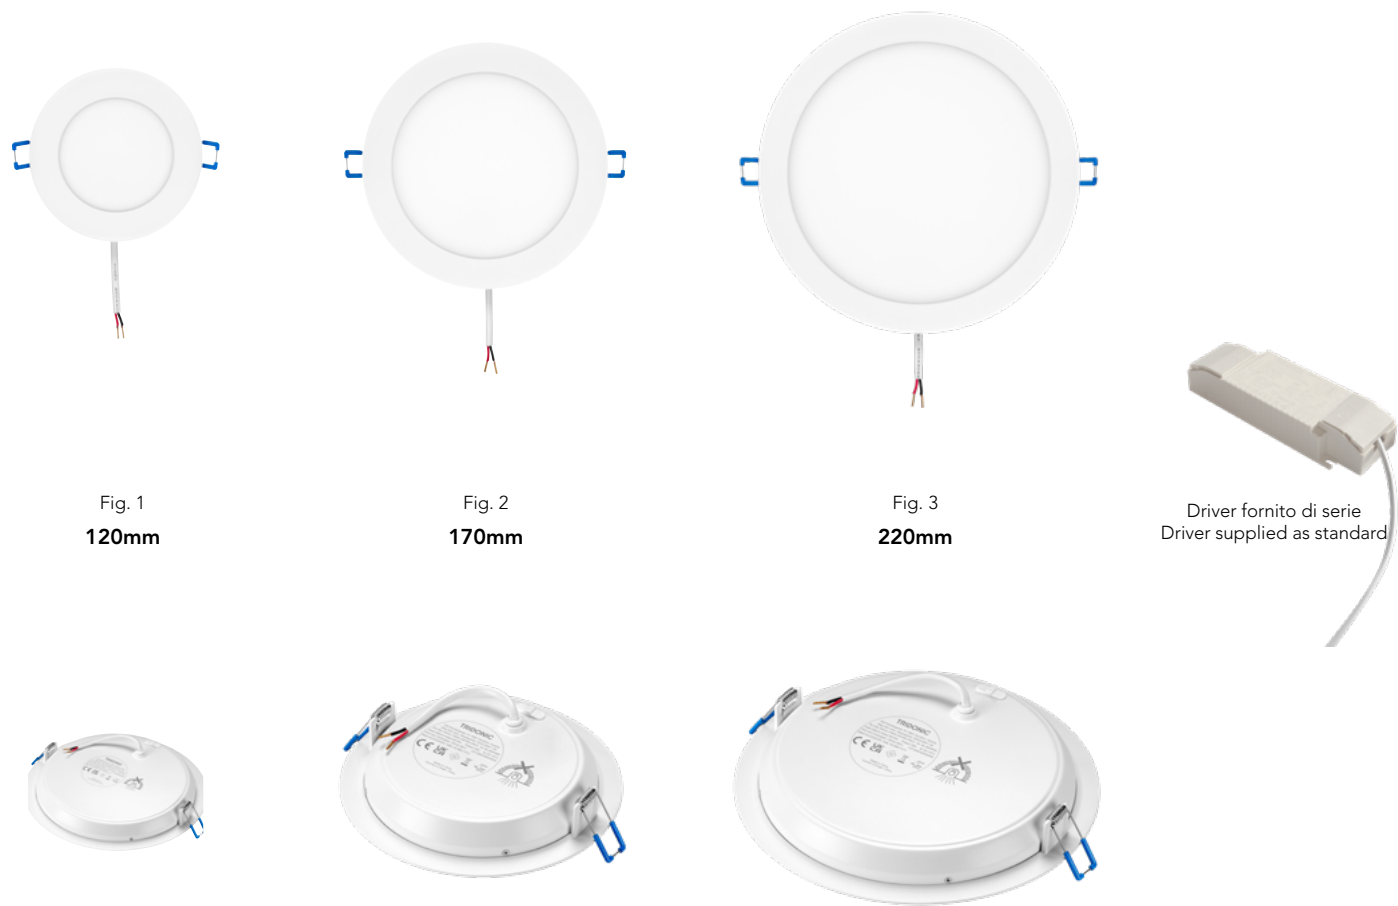

CODICE Code	DESCRIZIONE Description	POTENZA Power(W)	FLUSSO NOMINALE Typical flux(lm)	FLUSSO NETTO Net output(lm)	CORRENTE Current(mA)	FIGURA Figure	PESO NETTO Net weight(Kg)
730OP018TCW.1009	diam. 120mm 3/4/5500K	9W	1200	840	250	1	0,20
730OP018TCW.2013	diam. 170mm 3/4/5500K	13W	2075	1450	350	2	0,30
730OP018TCW.3018	diam. 220mm 3/4/5500K	18W	2975	2080	500	3	0,45

CODIFICA / CODING
Per maggiori informazioni sulla nuova codifica, fare riferimento alle pagine 394-399.
For more information on the new coding, please refer to pages 394-399.

Art. +	Optic + Ottica	Wiring Options + Opzioni di cablaggio integrate	CRI & °K + CRI e °Temperatura LED	Body colour + Colore corpo	Fig. + Figura	W Potenza
730	OP*	01=ON OFF * 03=Emergency 3h 05=DALI 07=DALI + Emerg 3h 14=Driver CASAMBI 16=Driver CASAMBI + Emerg 3h	8TC *	W. *	1 2 3	009 013 018

* Standard version