

# VELA EVO



Applique dallo spiccato carattere decorativo, ideale per ambienti residenziali, corridoi, aree di passaggio, bar, ristoranti, alberghi.

**Corpo:** lamiera di acciaio trattata in varie finiture.  
**Verniciatura:** polvere termoindurente poliestere.

**Diffusori disponibili:**

**IND:** illuminazione indiretta in lamiera;  
**DECO:** vetro curvo di spessore 4 mm lucido all'interno, sabbiato all'esterno.

**Pomelli di finitura:** pressofusione verniciati.  
**Moduli LED:** alimentati a 350mA e 600mA, realizzati con sistema B/C, per la riduzione di ombre e riflessi.  
**Temperatura colore:** 3000K, CRI>80, 3-step MacAdam, SDCM 3.

**Mantenimento del flusso luminoso:** 72.000h L80 B10 @ta25, 54.000h L80 B10 @ta40.

**Alimentazione:** driver 220-240V 50/60Hz, ripple free, SP system (protezione contro sovraccarico e cortocircuito), Active PFC.

**Efficienza Luminosa**  
Luminous Efficacy

**up to 158lm/W**

Decorative wall luminaire, ideal for residential applications, corridors, passage areas, shops, bars, restaurants, hotels.

**Housing:** steel treated in various finishing.  
**Paintwork:** polyester powder coating.  
**Available diffusers:**  
**IND:** steel plate diffuser for indirect lighting;  
**DECO:** 4 mm thick curved opal glass diffuser polished internally, sandblasted outside.

**Knobs:** diecast painted to match the main body.  
**LED modules:** powered at 350mA and 600mA, made with B/C system, for shadows and reflection reduction.  
**Color temperature:** 3000K, CRI>80, 3-step MacAdam, SDCM 3.  
**Lumen maintenance:** 72.000h L80 B10 @ta25, 54.000h L80 B10 @ta40.  
**Power supply:** driver 220-240V 50/60Hz, ripple free, SP system (overcharge and short circuit protection), Active PFC.


**SIMBOLOGIA / SIMBOLOGY** pag. 4-5




**OPZIONI DI INSTALLAZIONE / INSTALLATION OPTIONS**



**TEMPERATURA COLORE / COLOUR TEMPERATURE** pag. 264

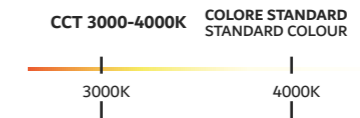

**VERSIONI DISPONIBILI / AVAILABLE VERSIONS**

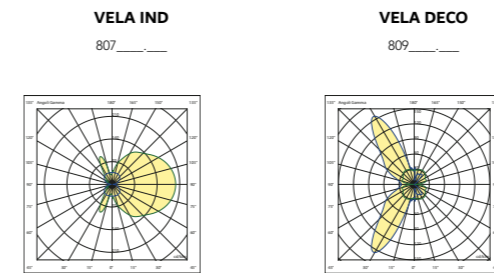

**COLORI DISPONIBILI / AVAILABLE COLOURS**

- 1 COLORE STANDARD STANDARD COLOUR  
Bianco White
- 2 Nero RAL 9005 RAL 9005 Black


**DIMENSIONI IMBALLO / PACKING DIMENSIONS**

Corpo Main body m<sup>3</sup> 0,010  
365x195x140mm


1 Pcs  
80 pcs

Diffusore Diffuser m<sup>3</sup> 0,007  
355x310x60mm

**COLORI E FINITURE DISPONIBILI / AVAILABLE COLORS AND FINISHING**

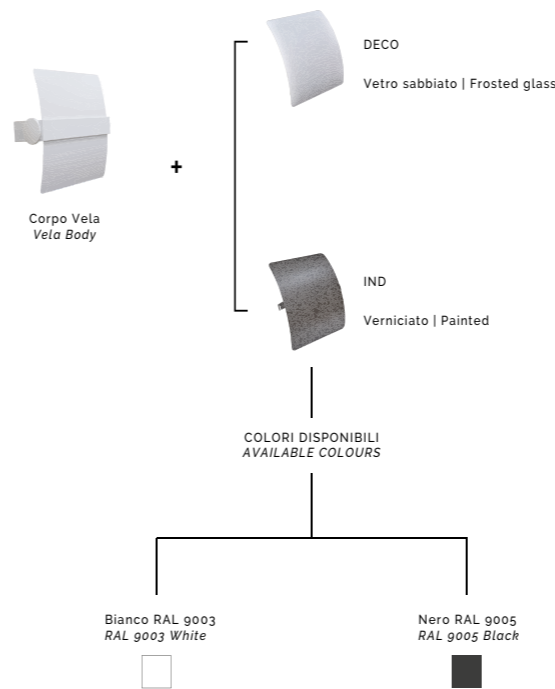

**DIMENSIONI / DIMENSIONS**

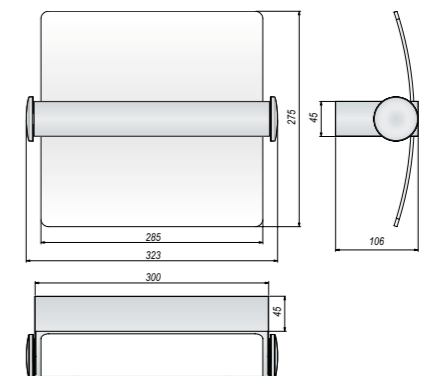

Per qualsiasi ulteriori informazione relativa ai colori, contattaci.  
For any further information regarding colours, please contact us.

